BRIZO®

KITCHEN

CATÁLOGO 2025



AKABA

22062025

Kitchen Collections



Rook® 68

PC PN SS BL PG GL SL



Artesso® 14

PC PN SS BL RB GL



Tulham™ 74

PC PN SS BLBNX GLPG SL



Kintsu® 26

PC PN SS BL BNX GL



Litze® 34

PC PN SS BLGL GL



Frank Lloyd Wright® by Brizo® 20

PC PN SS BNX GL

CR CT WD



Odin® 50

PC PN SS BL PG GL SL

MB CT WD BC



Jason Wu for Brizo™ 60

MW MWPN

MB PN CT PNWD BC

AVAILABLE FINISHES

- MATTE WHITE (MW)
- POLISHED CHROME (PC)
- *BRILLIANCE*® POLISHED NICKEL (PN)
- *BRILLIANCE*® LUXE NICKEL® (NK)
- *BRILLIANCE*® BRUSHED NICKEL (BN)
- *BRILLIANCE*® STAINLESS (SS)
- *BRILLIANCE*® POLISHED GOLD (PG)
- *BRILLIANCE*® LUXE GOLD® (GL)
- VENETIAN BRONZE® (RB)
- *BRILLIANCE*® LUXE STEEL® (SL)
- *BRILLIANCE*® BLACK ONYX (BNX)
- MATTE BLACK (BL)
- MATTE WHITE / *BRILLIANCE*® POLISHED NICKEL (MWPN)
- POLISHED CHROME / CLEAR (PCCL)
- *BRILLIANCE*® LUXE GOLD® / CLEAR (GLCL)
- POLISHED CHROME / WOOD (PCTK)
- *BRILLIANCE*® POLISHED NICKEL / WOOD (PNTK)
- *BRILLIANCE*® LUXE NICKEL® / WOOD (NKTK)
- *BRILLIANCE*® LUXE GOLD® / WOOD (GLTK)
- *BRILLIANCE*® LUXE GOLD® / *BRILLIANCE*® POLISHED GOLD (GLPG)
- *BRILLIANCE*® POLISHED NICKEL / COCOA BRONZE™ (PNCO)
- *BRILLIANCE*® LUXE NICKEL® / MATTE BLACK (NKBL)
- MATTE BLACK / *BRILLIANCE*® LUXE GOLD® (BLGL)
- MATTE BLACK / *BRILLIANCE*® LUXE STEEL® (BLSL)
- *BRILLIANCE*® BLACK ONYX / MATTE BLACK (BLBNX) OR (BNXBL)

HANDLE ACCENTS

- GLASS (CR)
- WHITE MARBLE (MB)
- *BRILLIANCE*® POLISHED NICKEL (PN)
- MOTHER OF PEARL (PL)
- CONCRETE (CT)
- SOLAR GREY GLASS
- WOOD (WD)
- MALACHITE (MC)
- BLACK CRYSTAL (BC)
- *BRILLIANCE*® POLISHED NICKEL / WOOD (PNWD)

New Frank Lloyd Wright® Pull-Down Kitchen and Pull-Down Prep Faucets with Square Spouts and Offset Lever Handles in *Brilliance*® Luxe Gold®

LATEST RELEASES

Ever *surprising*. Ever *inspiring*.

Breathtaking new statements. Complements to existing collections. And additional finish offerings across the board. Once again, we've expanded our portfolio with designs sure to inspire your newest vision.





For *the* kitchen

Frank Lloyd Wright® by Brizo® honors the architect's relentless spirit with a host of stylized silhouettes and uncommon accents. The Odin® Kitchen Collection welcomes new additions ranging from ***new* faucets** and **handles** to **outdoor** offerings. And the Kintsu® Kitchen Collection grows to include **Polished Nickel** among its finishes.



A LIFE *of* BEAUTY, ON YOUR OWN TERMS.





We believe fashion isn't a set of rules to be followed. It's the statement you make as you move through the world, the narrative you shape with every detail of your life. From the clothing you wear to the places you travel, the food you eat—and *yes*, the way you design your home—every detail should live in harmony.

Since our founding over 20 years ago, this philosophy has been our guiding light. We call it ***living fashion***: the idea that every choice is an opportunity for self-expression, and every nuance helps tell your story. Because the one thing that can never be copied is staying true to yourself.

REIMAGINING WHAT CAN BE *and* CREATING WHAT'S NEXT.

Our pioneering spirit doesn't stop at fashion-forward design. We've innovated every facet of the kitchen and bath experience—introducing thoughtfully engineered technologies that make everyday more efficient, more intuitive and ultimately, *more indulgent*.





Innovation *for the* Kitchen

DIAMOND SEAL® TECHNOLOGY

DIAMOND Seal® Technology uses a diamond-coated valve built to last up to 2 times longer than the industry standard (based on ASME 112.18.1 of up to 500,000 cycles).

VOICEIQ® TECHNOLOGY

Voice activation makes your life simpler and easier. Command your faucet to turn on and off, warm up the water, dispense a precise amount or use the innovative handwashing mode.

SMARTTOUCH® TECHNOLOGY

Allowing you to activate water flow with a simple tap to the faucet body, spout or handle, SmartTouch® Technology brings a new level of convenience to the kitchen.

MAGNEDOCK® TECHNOLOGY

The first of its kind available, MagneDock® Technology features a patented, state-of-the-art magnetic docking system to securely hold the spray wand in place when not in use.

ARTICULATING FAUCET

Available with either a finished or exposed hose, the Articulating Faucet offers a larger range of movement than a traditional pull-down faucet.






KITCHEN



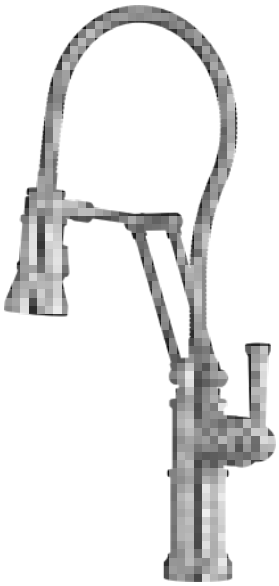

ARTESSO® KITCHEN COLLECTION

An industrial evolution.

The artisan tradition has never been more alluring. Tracing its visual inspiration to factories of the early 20th century, the Artesso® Kitchen Collection by Brizo® is a warmer, more refined take on the industrial aesthetic. An array of innovations, including a unique articulating architecture, MagneDock® Technology, and optional SmartTouch® Technology make the collection's functionality every bit the equal of its form.

reddot design award winner

Available Finishes

- POLISHED CHROME (PC)
- *BRILLIANCE®* POLISHED NICKEL (PN)
- *BRILLIANCE®* STAINLESS (SS)
- MATTE BLACK (BL)
- VENETIAN BRONZE® (RB)
- *BRILLIANCE®* LUXE GOLD® (GL)

KITCHEN FAUCETS

Item	Item No.	Description
 Pull-Down Faucet	63025LF-PC 63025LF-PN 63025LF-SS 63025LF-BL 63025LF-GL 63025LF-RB	• MagneDock® Technology – magnetic docking system • DIAMOND Seal® Technology • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 16 1/8", spout outlet to deck = 8 19/32", spout reach = 8 3/4", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa
 SmartTouch® Pull-Down Faucet	64025LF-PC 64025LF-PN 64025LF-SS 64025LF-BL 64025LF-GL 64025LF-RB	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EP100854) available for use with connected home devices. • Optional A/C adapter EP102157 • For additional product details reference the non-SmartTouch® Technology model
 Articulating Faucet	63225LF-PC 63225LF-PN 63225LF-SS 63225LF-BL 63225LF-GL 63225LF-RB	• Dual-jointed articulating arm with semi-flexible hose allows for flexible placement and maneuverability • MagneDock® Technology – magnetic docking system • DIAMOND Seal® Technology • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height varies with arm position. Maximum height = 21 1/2", maximum arm reach = 10 1/2", hose length = 23"; arm swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa
 SmartTouch® Articulating Faucet	64225LF-PC 64225LF-PN 64225LF-SS 64225LF-BL 64225LF-GL 64225LF-RB	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EP100854) available for use with connected home devices • Optional A/C adapter EP102157 • For additional product details reference the non-SmartTouch® Technology model

KITCHEN FAUCETS *(continued)*

Item	Item No.	Description
 Articulating Faucet with Finished Hose	**63125LF-PC** 63125LF-PN 63125LF-SS 63125LF-BL 63125LF-GL 63125LF-RB	• Dual-jointed articulating arm with semi-flexible metal hose allows for flexible placement and maneuverability • MagneDock® Technology – magnetic docking system • DIAMOND Seal® Technology • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height varies with arm position. Maximum height = 21 1/2", maximum arm reach = 10 1/2", hose length = 23"; arm swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa
 SmartTouch® Articulating Faucet with Finished Hose	64125LF-PC 64125LF-PN 64125LF-SS 64125LF-BL 64125LF-GL 64125LF-RB	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EP100854) available for use with connected home devices • Optional A/C adapter EP102157 • For additional product details reference the non-SmartTouch® Technology model
 Bridge Faucet with Side Sprayer	62525LF-PC 62525LF-PN 62525LF-SS 62525LF-BL 62525LF-GL 62525LF-RB	• Includes matching metal side sprayer • 3-hole installation • Solid brass one-piece waterway • Ceramic cartridges • Overall height = 13 21/34", spout outlet to deck = 10 5/32", spout reach = 8 19/32", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa

PREP FAUCETS

Item	Item No.	Description
 Pull-Down Prep Faucet	63925LF-PC 63925LF-PN 63925LF-SS 63925LF-BL 63925LF-GL 63925LF-RB	• MagneDock® Technology – magnetic docking system • DIAMOND Seal® Technology • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 14", spout outlet to deck = 7 3/8", spout reach = 7 9/16", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa

PREP FAUCETS *(continued)*

Item	Item No.	Description
 SmartTouch® Pull-Down Prep Faucet	64925LF-PC 64925LF-PN 64925LF-SS 64925LF-BL 64925LF-GL 64925LF-RB	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EP100854) available for use with connected home devices. • Optional A/C adapter EP102157 • For additional product details reference the non-SmartTouch® Technology model

BAR FAUCET

Item	Item No.	Description
 Bar Faucet	61025LF-PC 61025LF-PN 61025LF-SS 61025LF-BL 61025LF-GL 61025LF-RB	• 1-hole installation • Ceramic cartridge • Overall height = 13 9/64", spout outlet to deck = 9 1/16", spout reach = 6 1/32", spout swivels 360° • Accommodates up to 2 1/2" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa

INSTANT HOT FAUCET

Item	Item No.	Description
 Instant Hot Faucet	61325LF-H-PC 61325LF-H-PN 61325LF-H-SS 61325LF-H-BL 61325LF-H-GL 61325LF-H-RB	• Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 9 3/8", spout to deck = 6 3/16", spout reach = 5", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa

BEVERAGE FAUCET *(for details on the Pristive™ Tankless Reverse Osmosis System, see pages 84–89)*

Item	Item No.	Description
 Beverage Faucet	61325LF-C-PC 61325LF-C-PN 61325LF-C-SS 61325LF-C-BL 61325LF-C-GL 61325LF-C-RB	• DIAMOND Seal® Technology • Compatible with the Pristive™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 1/2", spout to deck = 6 1/16", spout reach = 5 1/16", spout swivels 360° • Accommodates up to 3" deck thickness • Integrated supply tubes • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain

POT FILLER

Item	Item No.	Description
 Wall Mount Pot Filler Faucet	62825LF-PC 62825LF-PN 62825LF-SS 62825LF-BL 62825LF-GL 62825LF-RB	• Two handle wall mount • 1-hole installation • Cold water only • Spout reach = 23 1/4" • Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa

ACCESSORIES *(for kitchen drains and additional accessories, see pages 94–97)*

Item	Item No.	Description
 Soap/Lotion Dispenser	RP75675PC RP75675PN RP75675SS RP75675BL RP75675GL RP75675RB	• Includes installation hardware • Accommodates up to 3" deck thickness • 2 3/4" overall height • 15-ounce bottle • Refillable from above the deck
 Optional Escutcheon	RP71451PN RP71451RB RP71451GL	• Includes installation hardware • Accommodates up to 3" deck thickness • 8" on center
 VoiceIQ™ Module	EP100854	• VoiceIQ® Technology for hands-free voice activation • For use with SmartTouch® faucets manufactured after January 2018 • Includes VoiceIQ™ module, cable and 9 volt power supply • Pairs with Amazon® Alexa® and Google® Assistant-enabled devices • Metered and custom dispensing options • Warm-up feature pre-heats the water to 95° • Handwashing mode using CDC recommended guidelines





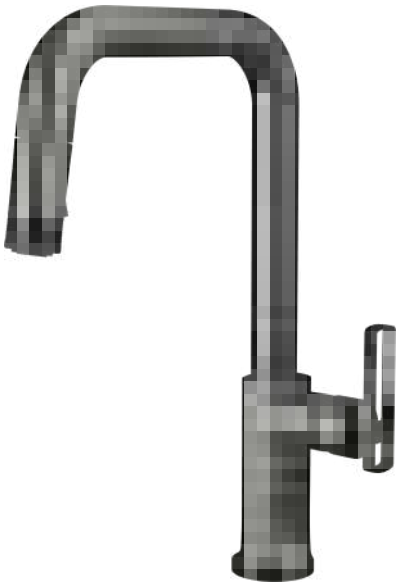

KINTSU® KITCHEN COLLECTION

A matter of balance.

Essential, yet evolved. Organic, yet cultivated. Instinctive, yet refined. Contradictions create harmony in the Kintsu® Kitchen Collection by Brizo. Its fluid lines speak to minimalist sensibilities, while crafted touches reflect an artisanal soul. Uniting Japanese and Scandinavian influences, the collection truly embodies the beauty of balance.

Available Finishes

- POLISHED CHROME (PC-L)*
- POLISHED NICKEL (PN-L)*
- STAINLESS (SS-L)*
- MATTE BLACK (BL)
- BLACK ONYX (BNX-L)*
- LUXE GOLD® (GL-L)*

*FEATURES LUMICOAT® TECHNOLOGY

KITCHEN FAUCETS

Item	Item No.	Description
 Widespread Pull-Down Faucet with Arc Spout - Less Handles	62506LF-PCLHP-L 62506LF-SSLHP-L 62506LF-BLLHP 62506LF-BNXLHP-L 62506LF-GLLHP-L	• MagneDock® Technology - magnetic wand docking system • Ceramic cartridge • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 3-hole installation • Overall height = 16 1/8", spout outlet to deck = 9 1/8", spout reach = 9 1/4", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • L = Lumicoat® Technology • Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs • MUST ORDER HANDLES SEPARATELY
 Widespread Pull-Down Faucet with Square Spout - Less Handles	62507LF-PCLHP-L 62507LF-SSLHP-L 62507LF-BLLHP 62507LF-BNXLHP-L 62507LF-GLLHP-L	• MagneDock® Technology - magnetic wand docking system • Ceramic cartridge • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 3-hole installation • Overall height = 15 15/16", spout outlet to deck = 9 7/8", spout reach = 9 5/16", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • L = Lumicoat® Technology • Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs • MUST ORDER HANDLES SEPARATELY

HANDLE KITS: *Widespread Pull-Down Faucets*

Item	Item No.	Item	Item No.	Description
 Lever	HK006-PC-L HK006-SS-L HK006-BL HK006-BNX-L HK006-GL-L	 Knob	HK007-PC-L HK007-SS-L HK007-BL HK007-BNX-L HK007-GL-L	• Handles are ADA compliant • Model number = one pair of handles • L = Lumicoat® Technology

KITCHEN FAUCETS *(continued)*

Item	Item No.	Description
 Pull-Down Faucet with Arc Spout - Less Handle	63006LF-PCLHP-L 63006LF-SSLHP-L 63006LF-BLLHP 63006LF-BNXLHP-L 63006LF-GLLHP-L	• DIAMOND Seal® Technology • MagneDock® Technology - magnetic wand docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 16 3/16", spout outlet to deck = 9", spout reach = 9 5/16", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • L = Lumicoat® Technology • Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs • MUST ORDER HANDLE SEPARATELY

KITCHEN FAUCETS *(continued)*

Item	Item No.	Description
 SmartTouch® Pull-Down Faucet with Arc Spout - Less Handle	64006LF-PCLHP-L 64006LF-SSLHP-L 64006LF-BLLHP 64006LF-BNXLHP-L 64006LF-GLLHP-L	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EPI02157 • Optional voice activation technology (EPI00854) available for use with connected home devices • For additional product details reference the non SmartTouch® Technology Model
 Pull-Down Faucet with Square Spout - Less Handle	63007LF-PCLHP-L 63007LF-SSLHP-L 63007LF-BLLHP 63007LF-BNXLHP-L 63007LF-GLLHP-L	• DIAMOND Seal® Technology • MagneDock® Technology - magnetic wand docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 16 1/8", spout outlet to deck = 10", spout reach = 9 1/8", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • L = Lumicoat® Technology • Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs • MUST ORDER HANDLE SEPARATELY
 SmartTouch® Pull-Down Faucet with Square Spout - Less Handle	64007LF-PCLHP-L 64007LF-SSLHP-L 64007LF-BLLHP 64007LF-BNXLHP-L 64007LF-GLLHP-L	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EPI02157 • Optional voice activation technology (EPI00854) available for use with connected home devices • For additional product details reference the non SmartTouch® Technology Model

PREP FAUCETS

Item	Item No.	Description
 Pull-Down Prep Faucet with Arc Spout - Less Handle	63906LF-PCLHP-L 63906LF-SSLHP-L 63906LF-BLLHP 63906LF-BNXLHP-L 63906LF-GLLHP-L	• DIAMOND Seal® Technology • MagneDock® Technology - magnetic wand docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 14 1/16", spout outlet to deck = 7 13/16", spout reach = 7 11/16", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • L = Lumicoat® Technology • Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs • MUST ORDER HANDLE SEPARATELY

PREP FAUCETS *(continued)*

Item	Item No.	Description
 SmartTouch® Pull-Down Prep Faucet with Arc Spout - Less Handle	64906LF-PCLHP-L 64906LF-SSLHP-L 64906LF-BLLHP 64906LF-BNXLHP-L 64906LF-GLLHP-L	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EPI02157 Optional voice activation technology (EPI00854) available for use with connected home devices • For additional product details reference the non SmartTouch® Technology Model
 Pull-Down Prep Faucet with Square Spout - Less Handle	63907LF-PCLHP-L 63907LF-SSLHP-L 63907LF-BLLHP 63907LF-BNXLHP-L 63907LF-GLLHP-L	• DIAMOND Seal® Technology • MagneDock® Technology - magnetic wand docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 14 1/16", spout outlet to deck = 7 13/16", spout reach = 7 1/4", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • L = Lumicoat® Technology • Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs • MUST ORDER HANDLE SEPARATELY
 SmartTouch® Pull-Down Prep Faucet with Square Spout - Less Handle	64907LF-PCLHP-L 64907LF-SSLHP-L 64907LF-BLLHP 64907LF-BNXLHP-L 64907LF-GLLHP-L	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EPI02157 • Optional voice activation technology (EPI00854) available for use with connected home devices • For additional product details reference the non SmartTouch® Technology Model

HANDLE KITS: *Pull-Down and Prep Faucets*

Item	Item No.	Item	Item No.	Description
 Lever	HLK006-PC-L HLK006-SS-L HLK006-BL HLK006-BNX-L HLK006-GL-L	 Knob	HLK007-PC-L HLK007-SS-L HLK007-BL HLK007-BNX-L HLK007-GL-L	• Handles are ADA compliant • L = Lumicoat® Technology

BAR FAUCETS

Item	Item No.	Description
 Bar Faucet with Arc Spout - Less Handle	61006LF-PCLHP-L 61006LF-SSLHP-L 61006LF-BLLHP 61006LF-BNXLHP-L 61006LF-GLLHP-L	• 1-hole installation • Ceramic cartridge • Overall height = 11 5/8", spout to deck = 8 7/16", spout reach = 5 7/8", spout swivels 360˚ • Accommodates up to 3" deck thickness • Comes with standard fittings • L = Lumicoat® Technology • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa
 Bar Faucet with Square Spout - Less Handle	61007LF-PCLHP-L 61007LF-SSLHP-L 61007LF-BLLHP 61007LF-BNXLHP-L 61007LF-GLLHP-L	• 1-hole installation • Ceramic cartridge • Overall height = 11 3/8", spout to deck = 8 9/16", spout reach = 5 7/8", spout swivels 360˚ • Accommodates up to 3" deck thickness • Comes with standard fittings • L = Lumicoat® Technology • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa

HANDLE KITS: *Bar Faucets*

Item	Item No.	Item	Item No.	Description
 Lever	HLB006-PC-L HLB006-SS-L HLB006-BL HLB006-BNX-L HLB006-GL-L	 Knob	HLB007-PC-L HLB007-SS-L HLB007-BL HLB007-BNX-L HLB007-GL-L	• Handles are ADA compliant • L = Lumicoat® Technology

INSTANT HOT FAUCETS

Item	Item No.	Description
 Instant Hot Faucet with Arc Spout	61306LF-H-PC-L 61306LF-H-SS-L 61306LF-H-BL 61306LF-H-BNX-L 61306LF-H-GL-L	• Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 9 5/8", spout to deck = 6 3/16", spout reach = 5 1/16", spout swivels 360˚ • Accommodates up to 3" deck thickness • L = Lumicoat® Technology • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa

INSTANT HOT FAUCETS *(continued)*

Item	Item No.	Description
 Instant Hot Faucet with Square Spout	61307LF-H-PC-L 61307LF-H-SS-L 61307LF-H-BL 61307LF-H-BNX-L 61307LF-H-GL-L	• Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 9 7/16", spout to deck = 6 5/16", spout reach = 5 1/16", spout swivels 360˚ • Accommodates up to 3" deck thickness • L = Lumicoat® Technology • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa

BEVERAGE FAUCETS *(for details on the Pristive™ Tankless Reverse Osmosis System, see pages 84-89)*

Item	Item No.	Description
 Beverage Faucet with Arc Spout	61306LF-C-PC-L 61306LF-C-SS-L 61306LF-C-BL 61306LF-C-BNX-L 61306LF-C-GL-L	• DIAMOND Seal® Technology • Compatible with the Pristive™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 7/16", spout to deck = 6 7/16", spout reach = 5 1/16", spout swivels 360˚ • Accommodates up to 3" deck thickness • Integrated supply tubes • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain • L = Lumicoat® Technology • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
 Beverage Faucet with Square Spout	61307LF-C-PC-L 61307LF-C-SS-L 61307LF-C-BL 61307LF-C-BNX-L 61307LF-C-GL-L	• DIAMOND Seal® Technology • Compatible with the Pristive™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 7/16", spout to deck = 6 7/16", spout reach = 5 1/16", spout swivels 360˚ • Accommodates up to 3" deck thickness • Integrated supply tubes • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain • L = Lumicoat® Technology • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa

POT FILLERS

Item	Item No.	Description
 Wall Mount Pot Filler with Lever Handle	62806LF-PC-L 62806LF-SS-L 62806LF-BL 62806LF-BNX-L 62806LF-GL-L	• Two handle wall mount • 1-hole installation • Cold water only • L = Lumicoat® Technology • Spout reach = 20 1/2"

POT FILLERS *(continued)*

Item	Item No.	Description
 Wall Mount Pot Filler with Knob Handle	62807LF-PC-L 62807LF-SS-L 62807LF-BL 62807LF-BNX-L 62807LF-GL-L	• Two handle wall mount • 1-hole installation • Cold water only • L = Lumicoat® Technology • Spout reach = 20 1/2"

ACCESSORIES *(for kitchen drains and additional accessories, see pages 94-97)*

Item	Item No.	Description
 Soap/Lotion Dispenser	695306-PC-L 695306-SS-L 695306-BL 695306-BNX-L 695306-GL-L	• Includes installation hardware • Accommodates up to 3" deck thickness • 2 3/4" overall height • 15-ounce bottle • Refillable from above the deck • L = Lumicoat® Technology
 Optional Escutcheon	690106-PC-L 690106-SS-L 690106-BL 690106-BNX-L 690106-GL-L	• Includes installation hardware • Accommodates up to 3" deck thickness • 8" on center • L = Lumicoat® Technology
 VoiceIQ® Module	EP100854	• VoiceIQ® Technology for hands-free voice activation • For use with SmartTouch® faucets manufactured after January 2018 • Includes VoiceIQ® module, cable and 9 volt power supply • Pairs with Amazon® Alexa® and Google® Assistant-enabled devices • Metered and custom dispensing options • Warm-up feature pre-heats the water to 95° • Handwashing mode using CDC recommended guidelines

HARDWARE

Item	Item No.	Description
 Drawer Knob	699206-PC 699206-BL 699206-BNX 699206-NK 699206-GL	• Mounting hardware included • All metal construction
 Bin Knob	699207-PC 699207-BL 699207-NK 699207-GL	• Mounting hardware included • All metal construction
 Drawer Pull	699106-PC 699106-BL 699106-BNX 699106-NK 699106-GL	• Mounting hardware included • All metal construction • 4" center to center distance
 Bin Pull	699107-PC 699107-BL 699107-BNX 699107-NK 699107-GL	• Mounting hardware included • All metal construction • 4" center to center distance





LITZE® KITCHEN COLLECTION

Art meets craft.

The Litze® Kitchen Collection by Brizo® melds a clean, contemporary sensibility with a crafted style to strike the perfect balance. With three distinct spout options, a unique articulating architecture and two handle designs, the collection is a true study in form. And carefully chosen touches—including deliberately placed knurling details, MagneDock® Technology and optional SmartTouch® Technology—provide functional benefits while celebrating the beauty of craftsmanship.

Available Finishes

POLISHED CHROME (PC)

BRILLIANCE® POLISHED NICKEL (PN)

BRILLIANCE® STAINLESS (SS)

MATTE BLACK/ *BRILLIANCE®* LUXE GOLD® (BLGL)

BRILLIANCE® LUXE GOLD® (GL)

Item	Item No.	Description
 Semi-Professional Kitchen Faucet with Knurled Handle	63343LF-PC 63343LF-PN 63343LF-SS 63343LF-BLGL 63343LF-GL	• DIAMOND Seal® Technology • MagneDock® Technology - magnetic wand docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 23 3/16", spout outlet to deck = 9 3/4", spout reach = 9 1/4", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs
 SmartTouch® Semi-Professional Kitchen Faucet with Knurled Handle	64343LF-PC 64343LF-PN 64343LF-SS 64343LF-BLGL 64343LF-GL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EP102157 • Optional voice activation technology (EP100854) available for use with connected home devices • For additional product details reference the non SmartTouch® Technology Model
 Semi-Professional Kitchen Faucet with Industrial Handle	63344LF-PC 63344LF-PN 63344LF-SS 63344LF-BLGL 63344LF-GL	• DIAMOND Seal® Technology • MagneDock® Technology - magnetic wand docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 23 3/16", spout outlet to deck = 9 3/4", spout reach = 9 1/4", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs
 SmartTouch® Semi-Professional Kitchen Faucet with Industrial Handle	64344LF-PC 64344LF-PN 64344LF-SS 64344LF-BLGL 64344LF-GL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EP102157 • Optional voice activation technology (EP100854) available for use with connected home devices • For additional product details reference the non SmartTouch® Technology Model

Item	Item No.	Description
 Pull-Down Faucet with Arc Spout and Knurled Handle	63043LF-PC 63043LF-PN 63043LF-SS 63043LF-BLGL 63043LF-GL	• MagneDock® Technology – magnetic docking system • Two-function pull-down wand: spray and stream • 1-hole installation • Euro-motion ceramic valve with InnoFlex™ waterways • Overall height = 16", spout outlet to deck = 8 3/8", spout reach = 8 11/16", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa
 SmartTouch® Pull-Down Faucet with Arc Spout and Knurled Handle	64043LF-PC 64043LF-PN 64043LF-SS 64043LF-BLGL 64043LF-GL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EP100854) available for use with connected home devices. • Optional A/C adapter EP102157 • For additional product details reference the non-SmartTouch® Technology model
 Pull-Down Faucet with Arc Spout and Industrial Handle	63044LF-PC 63044LF-PN 63044LF-SS 63044LF-BLGL 63044LF-GL	• MagneDock® Technology – magnetic docking system • Two-function pull-down wand: spray and stream • 1-hole installation • Euro-motion ceramic valve with InnoFlex™ waterways • Overall height = 16", spout outlet to deck = 8 3/8", spout reach = 8 11/16", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa
 SmartTouch® Pull-Down Faucet with Arc Spout and Industrial Handle	64044LF-PC 64044LF-PN 64044LF-SS 64044LF-BLGL 64044LF-GL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EP100854) available for use with connected home devices. • Optional A/C adapter EP102157 • For additional product details reference the non-SmartTouch® Technology model
 Pull-Down Faucet with Square Spout and Knurled Handle	63053LF-PC 63053LF-PN 63053LF-SS 63053LF-BLGL 63053LF-GL	• MagneDock® Technology – magnetic docking system • Two-function pull-down wand: spray and stream • 1-hole installation • Euro-motion ceramic valve with InnoFlex™ waterways • Overall height = 14", spout outlet to deck = 8 1/2", spout reach = 9", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa

Item	Item No.	Description
 SmartTouch® Pull-Down Faucet with Square Spout and Knurled Handle	64053LF-PC 64053LF-PN 64053LF-SS 64053LF-BLGL 64053LF-GL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EP100854) available for use with connected home devices. • Optional A/C adapter EP102157 • For additional product details reference the non-SmartTouch® Technology model
 Pull-Down Faucet with Square Spout and Industrial Handle	63054LF-PC 63054LF-PN 63054LF-SS 63054LF-BLGL 63054LF-GL	• MagneDock® Technology – magnetic docking system • Two-function pull-down wand: spray and stream • 1-hole installation • Euro-motion ceramic valve with InnoFlex™ waterways • Overall height = 14", spout outlet to deck = 8 1/2", spout reach = 9", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa
 SmartTouch® Pull-Down Faucet with Square Spout and Industrial Handle	64054LF-PC 64054LF-PN 64054LF-SS 64054LF-BLGL 64054LF-GL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EP100854) available for use with connected home devices. • Optional A/C adapter EP102157 • For additional product details reference the non-SmartTouch® Technology model
 Pull-Down Faucet with Angled Spout and Knurled Handle	63063LF-PC 63063LF-PN 63063LF-SS 63063LF-BLGL 63063LF-GL	• MagneDock® Technology – magnetic docking system • Two-function pull-down wand: spray and stream • 1-hole installation • Euro-motion ceramic valve with InnoFlex™ waterways • Overall height = 14 1/8", spout outlet to deck = 8 3/4", spout reach = 8 7/8", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa
 SmartTouch® Pull-Down Faucet with Angled Spout and Knurled Handle	64063LF-PC 64063LF-PN 64063LF-SS 64063LF-BLGL 64063LF-GL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EP100854) available for use with connected home devices. • Optional A/C adapter EP102157 • For additional product details reference the non-SmartTouch® Technology model

Item	Item No.	Description
 Pull-Down Faucet with Angled Spout and Industrial Handle	63064LF-PC 63064LF-PN 63064LF-SS 63064LF-BLGL 63064LF-GL	• MagneDock® Technology – magnetic docking system • Two-function pull-down wand: spray and stream • 1-hole installation • Euro-motion ceramic valve with InnoFlex™ waterways • Overall height = 14 1/8", spout outlet to deck = 8 3/4", spout reach = 8 7/8", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa
 SmartTouch® Pull-Down Faucet with Angled Spout and Industrial Handle	64064LF-PC 64064LF-PN 64064LF-SS 64064LF-BLGL 64064LF-GL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EP100854) available for use with connected home devices. • Optional A/C adapter EP102157 • For additional product details reference the non-SmartTouch® Technology model
 Articulating Faucet with Knurled Handle	63243LF-PC 63243LF-PN 63243LF-SS 63243LF-BLGL 63243LF-GL	• Dual-jointed articulating arm with semi-flexible hose allows for flexible placement and maneuverability • MagneDock® Technology – magnetic docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height varies with arm position. Maximum height = 21 1/2", maximum arm reach = 10 1/2", hose length = 23"; arm swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa
 SmartTouch® Articulating Faucet with Knurled Handle	64243LF-PC 64243LF-PN 64243LF-SS 64243LF-BLGL 64243LF-GL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EP100854) available for use with connected home devices. • Optional A/C adapter EP102157 • For additional product details reference the non-SmartTouch® Technology model
 Articulating Faucet with Finished Hose and Knurled Handle	63143LF-PC 63143LF-PN 63143LF-SS 63143LF-BLGL 63143LF-GL	• Dual-jointed articulating arm with semi-flexible metal hose allows for flexible placement and maneuverability • MagneDock® Technology – magnetic docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height varies with arm position. Maximum height = 21 1/2", maximum arm reach = 10 1/2", hose length = 23"; arm swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa

Item	Item No.	Description
 SmartTouch® Articulating Faucet with Finished Hose and Knurled Handle	64143LF-PC 64143LF-PN 64143LF-SS 64143LF-BLGL 64143LF-GL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EP100854) available for use with connected home devices • Optional A/C adapter EP102157 • For additional product details reference the non-SmartTouch® Technology model
 Articulating Faucet with Industrial Handle	63244LF-PC 63244LF-PN 63244LF-SS 63244LF-BLGL 63244LF-GL	• Articulating arm with 3 joints and semi-flexible hose allows for flexible placement and maneuverability • MagneDock® Technology – magnetic docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height varies with arm position. Maximum height = 21 1/2", maximum arm reach = 10 1/2", hose length = 23"; arm swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa
 SmartTouch® Articulating Faucet with Industrial Handle	64244LF-PC 64244LF-PN 64244LF-SS 64244LF-BLGL 64244LF-GL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EP100854) available for use with connected home devices. • Optional A/C adapter EP102157 • For additional product details reference the non-SmartTouch® Technology model
 Articulating Faucet with Finished Hose and Industrial Handle	63144LF-PC 63144LF-PN 63144LF-SS 63144LF-BLGL 63144LF-GL	• Dual-jointed articulating arm with semi-flexible metal hose allows for flexible placement and maneuverability • MagneDock® Technology – magnetic docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height varies with arm position. Maximum height = 21 1/2", maximum arm reach = 10 1/2", hose length = 23"; arm swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa
 SmartTouch® Articulating Faucet with Finished Hose and Industrial Handle	64144LF-PC 64144LF-PN 64144LF-SS 64144LF-BLGL 64144LF-GL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EP100854) available for use with connected home devices • Optional A/C adapter EP102157 • For additional product details reference the non-SmartTouch® Technology model

Item	Item No.	Description
 Bridge Faucet with Arc Spout and Knurled Handle	62543LF-PC 62543LF-PN 62543LF-SS 62543LF-BLGL 62543LF-GL	• Includes matching side sprayer • 3-hole installation • Solid brass one-piece waterway • Ceramic cartridges • Overall height = 15 3/8", spout outlet to deck = 10 7/8", spout reach = 8 1/4", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa • Optional decorative center hole cover available RP90934
 Bridge Faucet with Arc Spout and Industrial Handle	62544LF-PC 62544LF-PN 62544LF-SS 62544LF-BLGL 62544LF-GL	• Includes matching side sprayer • 3-hole installation • Solid brass one-piece waterway • Ceramic cartridges • Overall height = 15 3/8", spout outlet to deck = 10 7/8", spout reach = 8 1/4", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa • Optional decorative center hole cover available RP90934
 Bridge Faucet with Square Spout and Knurled Handle	62553LF-PC 62553LF-PN 62553LF-SS 62553LF-BLGL 62553LF-GL	• Includes matching side sprayer • 3-hole installation • Solid brass one-piece waterway • Ceramic cartridges • Overall height = 13 3/8", spout outlet to deck = 10 7/16", spout reach = 8 9/16", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa • Optional decorative center hole cover available RP90934
 Bridge Faucet with Square Spout and Industrial Handle	62554LF-PC 62554LF-PN 62554LF-SS 62554LF-BLGL 62554LF-GL	• Includes matching side sprayer • 3-hole installation • Solid brass one-piece waterway • Ceramic cartridges • Overall height = 13 3/8", spout outlet to deck = 10 7/16", spout reach = 8 9/16", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa • Optional decorative center hole cover available RP90934
 Bridge Faucet with Angled Spout and Knurled Handle	62563LF-PC 62563LF-PN 62563LF-SS 62563LF-BLGL 62563LF-GL	• Includes matching side sprayer • 3-hole installation • Solid brass one-piece waterway • Ceramic cartridges • Overall height = 13 1/2", spout outlet to deck = 10 7/8", spout reach = 8 1/4", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa • Optional decorative center hole cover available RP90934

KITCHEN FAUCETS *(continued)*

Item	Item No.	Description
 Bridge Faucet with Angled Spout and Industrial Handle	62564LF-PC 62564LF-PN 62564LF-SS 62564LF-BLGL 62564LF-GL	• Includes matching side sprayer • 3-hole installation • Solid brass one-piece waterway • Ceramic cartridges • Overall height = 13 1/2", spout outlet to deck = 10 7/8", spout reach = 8 1/4", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa • Optional decorative center hole cover available RP90934

PREP FAUCETS

Item	Item No.	Description
 Pull-Down Prep Faucet with Arc Spout and Knurled Handle	63943LF-PC 63943LF-PN 63943LF-SS 63943LF-BLGL 63943LF-GL	• DIAMOND Seal® Technology • MagneDock® Technology - magnetic wand docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 14", spout outlet to deck = 7 15/16", spout reach = 7 1/8", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs
 SmartTouch® Pull-Down Prep Faucet with Arc Spout and Knurled Handle	64943LF-PC 64943LF-PN 64943LF-SS 64943LF-BLGL 64943LF-GL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EPI02157 • Optional voice activation technology (EPI00854) available for use with connected home devices • For additional product details reference the non SmartTouch® Technology Model
 Pull-Down Prep Faucet with Arc Spout and Industrial Handle	63944LF-PC 63944LF-PN 63944LF-SS 63944LF-BLGL 63944LF-GL	• DIAMOND Seal® Technology • MagneDock® Technology - magnetic wand docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 14", spout outlet to deck = 7 15/16", spout reach = 7 1/8", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs

Item	Item No.	Description
 SmartTouch® Pull-Down Prep Faucet with Arc Spout and Industrial Handle	64944LF-PC 64944LF-PN 64944LF-SS 64944LF-BLGL 64944LF-GL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EPI02157 • Optional voice activation technology (EPI00854) available for use with connected home devices • For additional product details reference the non SmartTouch® Technology Model
 Pull-Down Prep Faucet with Square Spout and Knurled Handle	63953LF-PC 63953LF-PN 63953LF-SS 63953LF-BLGL 63953LF-GL	• DIAMOND Seal® Technology • MagneDock® Technology - magnetic wand docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 13 1/2", spout outlet to deck = 7 7/8", spout reach = 7 1/16", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs
 SmartTouch® Pull-Down Prep Faucet with Square Spout and Knurled Handle	64953LF-PC 64953LF-PN 64953LF-SS 64953LF-BLGL 64953LF-GL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EPI02157 • Optional voice activation technology (EPI00854) available for use with connected home devices • For additional product details reference the non SmartTouch® Technology Model
 Pull-Down Prep Faucet with Square Spout and Industrial Handle	63954LF-PC 63954LF-PN 63954LF-SS 63954LF-BLGL 63954LF-GL	• DIAMOND Seal® Technology • MagneDock® Technology - magnetic wand docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 13 1/2", spout outlet to deck = 7 7/8", spout reach = 7 1/16", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs
 SmartTouch® Pull-Down Prep Faucet with Square Spout and Industrial Handle	64954LF-PC 64954LF-PN 64954LF-SS 64954LF-BLGL 64954LF-GL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EPI02157 • Optional voice activation technology (EPI00854) available for use with connected home devices • For additional product details reference the non SmartTouch® Technology Model

Item	Item No.	Description
 Pull-Down Prep Faucet with Angle Spout and Knurled Handle	63963LF-PC 63963LF-PN 63963LF-SS 63963LF-BLGL 63963LF-GL	• DIAMOND Seal® Technology • MagneDock® Technology - magnetic wand docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 14", spout outlet to deck = 7 7/8", spout reach = 7", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs
 SmartTouch® Pull-Down Prep Faucet with Angle Spout and Knurled Handle	64963LF-PC 64963LF-PN 64963LF-SS 64963LF-BLGL 64963LF-GL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EP102157 • Optional voice activation technology (EP100854) available for use with connected home devices • For additional product details reference the non SmartTouch® Technology Model
 Pull-Down Prep Faucet with Angle Spout and Industrial Handle	63964LF-PC 63964LF-PN 63964LF-SS 63964LF-BLGL 63964LF-GL	• DIAMOND Seal® Technology • MagneDock® Technology - magnetic wand docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 14", spout outlet to deck = 7 7/8", spout reach = 7", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs
 SmartTouch® Pull-Down Prep Faucet with Angle Spout and Industrial Handle	64964LF-PC 64964LF-PN 64964LF-SS 64964LF-BLGL 64964LF-GL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EP102157 • Optional voice activation technology (EP100854) available for use with connected home devices • For additional product details reference the non SmartTouch® Technology Model

BAR FAUCETS

Item	Item No.	Description
 Bar Faucet with Arc Spout and Knurled Handle	61043LF-PC 61043LF-PN 61043LF-SS 61043LF-BLGL 61043LF-GL	• 1-hole installation • Ceramic cartridge • Overall height = 11 5/8", spout outlet to deck = 8 5/16", spout reach = 6", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa
 Bar Faucet with Arc Spout and Industrial Handle	61044LF-PC 61044LF-PN 61044LF-SS 61044LF-BLGL 61044LF-GL	• 1-hole installation • Ceramic cartridge • Overall height = 11 5/8", spout outlet to deck = 8 5/16", spout reach = 6", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa
 Bar Faucet with Square Spout and Knurled Handle	61053LF-PC 61053LF-PN 61053LF-SS 61053LF-BLGL 61053LF-GL	• 1-hole installation • Ceramic cartridge • Overall height = 11 5/16", spout outlet to deck = 8 3/8", spout reach = 5 7/8", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa
 Bar Faucet with Square Spout and Industrial Handle	61054LF-PC 61054LF-PN 61054LF-SS 61054LF-BLGL 61054LF-GL	• 1-hole installation • Ceramic cartridge • Overall height = 11 5/16", spout outlet to deck = 8 3/8", spout reach = 5 7/8", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa

BAR FAUCETS *(continued)*

Item	Item No.	Description
 Bar Faucet with Angled Spout and Knurled Handle	61063LF-PC 61063LF-PN 61063LF-SS 61063LF-BLGL 61063LF-GL	• 1-hole installation • Ceramic cartridge • Overall height = 11 1/2", spout outlet to deck = 8 3/8", spout reach = 6", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa
 Bar Faucet with Angled Spout and Industrial Handle	61064LF-PC 61064LF-PN 61064LF-SS 61064LF-BLGL 61064LF-GL	• 1-hole installation • Ceramic cartridge • Overall height = 11 1/2", spout outlet to deck = 8 3/8", spout reach = 6", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa

INSTANT HOT FAUCETS

Item	Item No.	Description
 Instant Hot Faucet with Arc Spout and Knurled Handle	61343LF-H-PC 61343LF-H-PN 61343LF-H-SS 61343LF-H-BLGL 61343LF-H-GL	• Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 9 1/16", spout to deck = 5 7/8", spout reach = 5", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa
 Instant Hot Faucet with Square Spout and Knurled Handle	61353LF-H-PC 61353LF-H-PN 61353LF-H-SS 61353LF-H-BLGL 61353LF-H-GL	• Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 8 15/16", spout to deck = 6 3/16", spout reach = 5", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa

INSTANT HOT FAUCETS *(continued)*

Item	Item No.	Description
 Instant Hot Faucet with Angled Spout and Knurled Handle	61363LF-H-PC 61363LF-H-PN 61363LF-H-SS 61363LF-H-BLGL 61363LF-H-GL	• Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 9", spout to deck = 6 3/16", spout reach = 5", spout swivels 360˚ • Accommodates up to 3" deck thickness • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa

BEVERAGE FAUCETS *(for details on the Pristive™ Tankless Reverse Osmosis System, see pages 84–89)*

Item	Item No.	Description
 Beverage Faucet with Arc Spout and Knurled Handle	61343LF-C-PC 61343LF-C-PN 61343LF-C-SS 61343LF-C-BLGL 61343LF-C-GL	• DIAMOND Seal® Technology • Compatible with the Pristive™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 1/2", spout to deck = 6 1/16", spout reach = 5 1/16", spout swivels 360˚ • Accommodates up to 3" deck thickness • Integrated supply tubes • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain
 Beverage Faucet with Square Spout and Knurled Handle	61353LF-C-PC 61353LF-C-PN 61353LF-C-SS 61353LF-C-BLGL 61353LF-C-GL	• DIAMOND Seal® Technology • Compatible with the Pristive™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 7/16", spout to deck = 6 7/16", spout reach = 5", spout swivels 360˚ • Accommodates up to 3" deck thickness • Integrated supply tubes • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain
 Beverage Faucet with Angled Spout and Knurled Handle	61363LF-C-PC 61363LF-C-PN 61363LF-C-SS 61363LF-C-BLGL 61363LF-C-GL	• DIAMOND Seal® Technology • Compatible with the Pristive™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 11/16", spout to deck = 6 5/16", spout reach = 5", spout swivels 360˚ • Accommodates up to 3" deck thickness • Integrated supply tubes • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain

POT FILLERS

Item	Item No.	Description
 Wall Mount Pot Filler Faucet with Knurled Handle	62843LF-PC 62843LF-PN 62843LF-SS 62843LF-BLGL 62843LF-GL	• Two handle wall mount • 1-hole installation • Cold water only • Spout reach = 23 1/4" • Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa
 Wall Mount Pot Filler Faucet with Industrial Handle	62844LF-PC 62844LF-PN 62844LF-SS 62844LF-BLGL 62844LF-GL	• Two handle wall mount • 1-hole installation • Cold water only • Spout reach = 23 1/4" • Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa

ACCESSORIES *(for kitchen drains and additional accessories, see pages 94–97)*

 Hole Cover	RP90934PC RP90934PN RP90934SS RP90934BL RP90934GL	• Includes installation hardware • Accommodates up to 3" deck thickness • 1/3" overall height

ACCESSORIES *(continued) (for kitchen drains and additional accessories, see pages 94-97)*

Item	Item No.	Description
 VoiceIQ® Module	EP100854	• VoiceIQ® Technology for hands-free voice activation • For use with SmartTouch® faucets manufactured after January 2018 • Includes VoiceIQ® module, cable and 9 volt power supply • Pairs with Amazon® Alexa® and Google® Assistant-enabled devices • Metered and custom dispensing options • Warm-up feature pre-heats the water to 95° • Handwashing mode using CDC recommended guidelines

HARDWARE

Item	Item No.	Description
 Drawer Knob	699235-PC 699235-PN 699235-NK 699235-BL 699235-SL 699235-GL	• Mounting hardware included • All metal construction
 Drawer Pull	699135-PC 699135-PN 699135-NK 699135-BL 699135-SL 699135-GL	• Mounting hardware included • All metal construction
 Drawer Pull with Knurling	699137-PC 699137-PN 699137-NK 699137-BLGL 699137-BLSL 699137-SL 699137-GL	• Mounting hardware included • All metal construction • 4 1/4" center to center distance







ODIN® KITCHEN COLLECTION

Both one and many.

In the Odin® Kitchen Collection by Brizo®, a singular aesthetic finds manifold expression. The streamlined silhouette takes on new distinction with each of seven finishes, while multiple handles and spout configurations add complexity and variety. Embodying both unity and diversity, the collection represents an exquisite multiplicity.

Available Finishes

- POLISHED CHROME (PC)
- *BRILLIANCE®* POLISHED NICKEL (PN)
- *BRILLIANCE®* STAINLESS (SS)
- MATTE BLACK (BL)
- *BRILLIANCE®* POLISHED GOLD (PG)
- *BRILLIANCE®* LUXE STEEL® (SL)
- *BRILLIANCE®* LUXE GOLD® (GL)
- MARINE-GRADE STAINLESS (SS-OD)

Handle Accents

- WOOD (WD)
- CONCRETE (CT)
- BLACK CRYSTAL (BC)
- MARBLE (MB)

KITCHEN FAUCETS

Item	Item No.	Description
 Semi-Professional Kitchen Faucet – Less Handle	63375LF-PCLHP 63375LF-PNLHP 63375LF-SSLHP 63375LF-BLLHP 63375LF-PGLHP 63375LF-SLLHP 63375LF-GLLHP	• DIAMOND Seal® Technology • MagneDock® Technology – magnetic wand docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® Nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 22 13/16", spout outlet to deck = 9 1/16", spout reach = 9 2/16", spout swivels 360° • Accommodates up to 3" deck thickness • Finished, semi-flexible metal hose • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPs
 SmartTouch® Semi-Professional Kitchen Faucet – Less Handle	64375LF-PCLHP 64375LF-PNLHP 64375LF-SSLHP 64375LF-BLLHP 64375LF-PGLHP 64375LF-SLLHP 64375LF-GLLHP	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EP102157 • Optional voice activation technology (EP100854) available for use with connected home devices • For additional product details reference the non SmartTouch® Technology Model
 Pull-Down Faucet with Arc Spout – Less Handle	63075LF-PCLHP 63075LF-PNLHP 63075LF-SSLHP 63075LF-BLLHP 63075LF-PGLHP 63075LF-SLLHP 63075LF-GLLHP	• DIAMOND Seal® Technology • MagneDock® Technology – magnetic docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 16 9/16", spout outlet to deck = 9", spout reach = 8 5/8", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa
 SmartTouch® Pull-Down Faucet with Arc Spout – Less Handle	64075LF-PCLHP 64075LF-PNLHP 64075LF-SSLHP 64075LF-BLLHP 64075LF-PGLHP 64075LF-SLLHP 64075LF-GLLHP	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EP102157 • Optional voice activation technology (EP100854) available for use with connected home devices • For additional product details reference the non-SmartTouch® Technology model

KITCHEN FAUCETS *(continued)*

Item	Item No.	Description
 Pull-Down Faucet with Square Spout – Less Handle	63065LF-PCLHP 63065LF-PNLHP 63065LF-SSLHP 63065LF-BLLHP 63065LF-PGLHP 63065LF-SLLHP 63065LF-GLLHP	• DIAMOND Seal® Technology • MagneDock® Technology – magnetic docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 14 5/8", spout outlet to deck = 9 1/16", spout reach = 8 15/16", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa • MUST ORDER HANDLE SEPARATELY
 SmartTouch® Pull-Down Faucet with Square Spout – Less Handle	64065LF-PCLHP 64065LF-PNLHP 64065LF-SSLHP 64065LF-BLLHP 64065LF-PGLHP 64065LF-SLLHP 64065LF-GLLHP	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EP102157 • Optional voice activation technology (EP100854) available for use with connected home devices • For additional product details reference the non-SmartTouch® Technology model

PREP FAUCETS

Item	Item No.	Description
 Pull-Down Prep Faucet with Arc Spout – Less Handle	63975LF-PCLHP 63975LF-PNLHP 63975LF-SSLHP 63975LF-BLLHP 63975LF-PGLHP 63975LF-SLLHP 63975LF-GLLHP	• DIAMOND Seal® Technology • MagneDock® Technology – magnetic docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 12 7/8", spout outlet to deck = 6 13/16", spout reach = 7 1/8", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa • MUST ORDER HANDLE SEPARATELY
 SmartTouch® Pull-Down Prep Faucet with Arc Spout – Less Handle	64975LF-PCLHP 64975LF-PNLHP 64975LF-SSLHP 64975LF-BLLHP 64975LF-PGLHP 64975LF-SLLHP 64975LF-GLLHP	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EP102157 • Optional voice activation technology (EP100854) available for use with connected home devices • For additional product details reference the non-SmartTouch® Technology model



Pull-Down Prep Faucet with Square Spout – Less Handle

63965LF-PCLHP
63965LF-PNLHP
63965LF-SSLHP
63965LF-BLLHP
63965LF-PGLHP
63965LF-SLLHP
63965LF-GLLHP

- DIAMOND Seal® Technology
- MagneDock® Technology – magnetic docking system
- Euro-motion Diamond™ Valve with InnoFlex™ waterways
- Touch-Clean® nozzles – swipe away mineral deposits
- Two-function wand: spray and stream
- 1-hole installation
- Overall height = 12 1/8", spout outlet to deck = 6 5/8", spout reach = 7 1/16", spout swivels 360°
- Accommodates up to 3" deck thickness
- Comes with standard fittings
- Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa
- MUST ORDER HANDLE SEPARATELY



SmartTouch® Pull-Down Prep Faucet with Square Spout – Less Handle

64965LF-PCLHP
64965LF-PNLHP
64965LF-SSLHP
64965LF-BLLHP
64965LF-PGLHP
64965LF-SLLHP
64965LF-GLLHP

- SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light
- Optional A/C adapter EP102157

Optional voice activation technology (EP100854) available for use with connected home devices

- For additional product details reference the non-SmartTouch® Technology model

HANDLE KITS: *Semi-Professional, Pull-Down, Articulating & Prep Faucets*

Item	Item No.	Item	Item No.	Description
 Metal Lever	HLK175-PC HLK175-PN HLK175-SS HLK175-BL HLK175-PG HLK175-SL HLK175-GL	 Wood Lever	HLK177-PCWD HLK177-PNWD HLK177-SSWD HLK177-BLWD HLK177-PGWD HLK177-SLWD HLK177-GLWD	• Lever Handles are ADA compliant • WD = Guyana Teak Wood • BC = Black Crystal • CT = Concrete • MB = Marble • Handle accents are derived from natural materials and will have unique variations in color and texture

BAR FAUCETS

Item	Item No.	Description
 Bar Faucet with Arc Spout – Less Handle	61075LF-PCLHP 61075LF-PNLHP 61075LF-SSLHP 61075LF-BLLHP 61075LF-PGLHP 61075LF-SLLHP 61075LF-GLLHP	• 1-hole installation • Ceramic cartridge • Overall height = 11 5/8", spout outlet to deck = 8 3/8", spout reach = 6", spout swivels 360° • Accommodates up to 2 1/2" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa • MUST ORDER HANDLE SEPARATELY
 Bar Faucet with Square Spout – Less Handle	61065LF-PCLHP 61065LF-PNLHP 61065LF-SSLHP 61065LF-BLLHP 61065LF-PGLHP 61065LF-SLLHP 61065LF-GLLHP	• 1-hole installation • Ceramic cartridge • Overall height = 11 1/4", spout outlet to deck = 8 7/16", spout reach = 5 7/8", spout swivels 360° • Accommodates up to 2 1/2" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa • MUST ORDER HANDLE SEPARATELY

HANDLE KITS: *Bar Faucets*

Item	Item No.	Item	Item No.	Description
 Metal Lever	HLB175-PC HLB175-PN HLB175-SS HLB175-BL HLB175-PG HLB175-SL HLB175-GL	 Wood Lever	HLB177-PCWD HLB177-PNWD HLB177-SSWD HLB177-BLWD HLB177-PGWD HLB177-SLWD HLB177-GLWD	• Handles are ADA compliant • WD = Guyana Teak Wood • The nature of natural wood gives each wood piece a distinct texture and color

POT FILLER

Item	Item No.	Description
 Linear Wall Mount Pot Filler Faucet	62820LF-PC 62820LF-PN 62820LF-SS 62820LF-BL 62820LF-PG 62820LF-SL 62820LF-GL	• Two handle wall mount • 1-hole installation • Cold water only • Spout reach = 23 1/4" • Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa

ACCESSORIES *(for kitchen drains and additional accessories, see pages 94-97)*

Item	Item No.	Description
 Soap/Lotion Dispenser	RP79275PG RP79275SL	• Includes installation hardware • Accommodates up to 3" deck thickness • 2 3/4" overall height • 15-ounce bottle • Refillable from above the deck
 Optional Escutcheon	RP71451PG RP71451SL	• Includes installation hardware • Accommodates up to 3" deck thickness • 8" on center

ACCESSORIES *(continued) (for kitchen drains and additional accessories, see pages 94-97)*

Item	Item No.	Description
 Hole Cover	RP90934PC RP90934PN RP90934SS RP90934BL RP90934PG RP90934SL RP90934GL	• Includes installation hardware • Accommodates up to 3" deck thickness • 1/3" overall height
 VoiceIQ® Module	EP100854	• VoiceIQ® Technology for hands-free voice activation • For use with SmartTouch® faucets manufactured after January 2018 • Includes VoiceIQ® module, cable and 9 volt power supply • Pairs with Amazon® Alexa® and Google® Assistant-enabled devices • Metered and custom dispensing options • Warm-up feature pre-heats the water to 95° • Handwashing mode using CDC recommended guidelines

HARDWARE

Item	Item No.	Description
 Drawer Knob	699275-PC 699275-BL 699275-GL 699275-BN	• Mounting hardware included • All metal construction
 Drawer Pull	699175-PC 699175-BL 699175-GL 699175-BN	• Mounting hardware included • All metal construction • 3 3/4" center to center distance





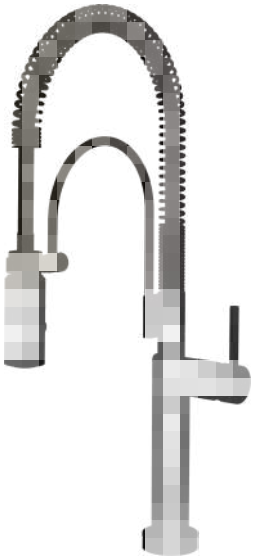

JASON WU FOR BRIZO™ KITCHEN COLLECTION

The audacity of simplicity.

Sometimes, the simplest expression makes the loudest statement. Nowhere is that more evident than in the Jason Wu for Brizo™ Kitchen Collection. Its fresh, streamlined aesthetic breaks through the noise with stunning clarity—bringing new vibrance to the familiar.

Available Finishes

- MATTE WHITE (MW)
- MATTE WHITE / *BRILLIANCE*® POLISHED NICKEL (MWPN)

Handle Accents

- *BRILLIANCE*® POLISHED NICKEL / WOOD (MWWD)
- *BRILLIANCE*® POLISHED NICKEL (MWPN)
- CONCRETE (CT)
- BLACK CRYSTAL (BC)
- MARBLE (MB)

Item	Item No.	Description
 Semi-Professional Kitchen Faucet – Less Handle	63375LF-MWLHP 63375LF-MWPNLHP	• MagneDock® Technology - magnetic wand docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 22 13/16", spout outlet to deck = 9 1/16", spout reach = 9 2/16", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Finished, semi-flexible metal hose • Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs • MUST ORDER HANDLE SEPARATELY
 SmartTouch® Semi-Professional Kitchen Faucet – Less Handle	64375LF-MWLHP 64375LF-MWPNLHP	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EP102157 • Optional voice activation technology (EP100854) available for use with connected home devices • For additional product details reference the non SmartTouch® Technology Model
 Pull-Down Faucet with Arc Spout – Less Handle	63075LF-MWLHP	• MagneDock® Technology – magnetic docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function pull-down wand: spray and stream • 1-hole installation • Overall height = 16 9/16", spout outlet to deck = 9", spout reach = 8 5/8", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa • MUST ORDER HANDLE SEPARATELY
 SmartTouch® Pull-Down Faucet with Arc Spout – Less Handle	64075LF-MWLHP	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EP102157 • Optional voice activation technology (EP100854) available for use with connected home devices • For additional product details reference the non-SmartTouch® Technology model

KITCHEN FAUCETS *(continued)*

Item	Item No.	Description
 Pull-Down Faucet with Square Spout – Less Handle	63065LF-MWLHP	• MagneDock® Technology – magnetic docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function pull-down wand: spray and stream • 1-hole installation • Overall height = 14 5/8", spout outlet to deck =9 1/16", spout reach = 8 15/16", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa • MUST ORDER HANDLE SEPARATELY
 SmartTouch® Pull-Down Faucet with Square Spout – Less Handle	64065LF-MWLHP	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EP102157 • Optional voice activation technology (EP100854) available for use with connected home devices • For additional product details reference the non-SmartTouch® Technology model

PREP FAUCETS

Item	Item No.	Description
 Pull-Down Prep Faucet with Arc Spout – Less Handle	63975LF-MWLHP	• MagneDock® Technology – magnetic docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 12 7/8", spout outlet to deck = 6 13/16", spout reach = 7 1/8", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa • MUST ORDER HANDLE SEPARATELY
 SmartTouch® Pull-Down Prep Faucet with Arc Spout – Less Handle	64975LF-MWLHP	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EP102157 • Optional voice activation technology (EP100854) available for use with connected home devices • For additional product details reference the non-SmartTouch® Technology model

PREP FAUCETS *(continued)*

Item	Item No.	Description
 Pull-Down Prep Faucet with Square Spout – Less Handle	63965LF-MWLHP	• MagneDock® Technology – magnetic docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 12 1/8", spout outlet to deck = 6 5/8", spout reach = 7 1/16", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa • MUST ORDER HANDLE SEPARATELY
 SmartTouch® Pull-Down Prep Faucet with Square Spout – Less Handle	64965LF-MWLHP	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EP102157 • Optional voice activation technology (EP100854) available for use with connected home devices • For additional product details reference the non-SmartTouch® Technology model

HANDLE KITS: *Semi-Professional, Pull-Down, and Prep Faucets*

Item	Item No.	Item	Item No.	Description
 Metal Lever	HLK175-MW HLK175-MWPN	 Wood Lever	HLK177-MWWD	• Lever handles are ADA compliant • BC = Black Crystal • CT = Concrete • MB = Marble • MWWD = Guyana teak wood lever with Brilliance® Polished Nickel tip • Handle accents are derived from natural materials and will have unique variations in color and texture

BAR FAUCETS

Item	Item No.	Description
 Bar Faucet with Arc Spout – Less Handle	61075LF-MWLHP	• 1-hole installation • Ceramic cartridge • Overall height = 11 5/8", spout outlet to deck = 8 3/8", spout reach = 6", spout swivels 360° • Accommodates up to 2 1/2" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa • MUST ORDER HANDLE SEPARATELY
 Bar Faucet with Square Spout – Less Handle	61065LF-MWLHP	• 1-hole installation • Ceramic cartridge • Overall height = 11 1/4", spout outlet to deck = 8 7/16", spout reach = 5 7/8", spout swivels 360° • Accommodates up to 2 1/2" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa • MUST ORDER HANDLE SEPARATELY

HANDLE KITS: *Bar Faucets*

Item	Item No.	Item	Item No.	Description
 Metal Lever	HLB175-MW HLB175-MWPN	 Wood Lever	HLB177-MWWD	• Handles are ADA compliant • MWWD = Guyana teak wood lever with Brilliance® Polished Nickel tip • The nature of natural wood gives each wood piece a distinct texture and color

INSTANT HOT FAUCETS

Item	Item No.	Description
 Instant Hot Faucet with Arc Spout	61320LF-H-MW	• Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 9 1/16", spout to deck = 5 7/8", spout reach = 5", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa

INSTANT HOT FAUCETS *(continued)*

Item	Item No.	Description
 Instant Hot Faucet with Square Spout	61365LF-H-MW	• Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 8 15/16", spout to deck = 6 3/16", spout reach = 5", spout swivels 360˚ • Accommodates up to 3" deck thickness • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa

BEVERAGE FAUCETS *(for details on the Pristive™ Tankless Reverse Osmosis System, see pages 84-89)*

Item	Item No.	Description
 Beverage Faucet with Arc Spout	61320LF-C-MW	• DIAMOND Seal® Technology • Compatible with the Pristive™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 1/2", spout to deck = 6 1/16", spout reach = 5 1/16", spout swivels 360˚ • Accommodates up to 3" deck thickness • Integrated supply tubes • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
 Beverage Faucet with Square Spout	61365LF-C-MW	• DIAMOND Seal® Technology • Compatible with the Pristive™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 7/16", spout to deck = 6 7/16", spout reach = 5", spout swivels 360˚ • Accommodates up to 3" deck thickness • Integrated supply tubes • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa

POT FILLER

Item	Item No.	Description
 Linear Wall Mount Pot Filler Faucet	62820LF-MW	• Two handle wall mount • 1-hole installation • Cold water only • Spout reach = 23 1/4"

ACCESSORIES *(for kitchen drains and additional accessories, see pages 94-97)*

Item	Item No.	Description
 Soap/Lotion Dispenser	RP79275MW	• Includes installation hardware • Accomodates up to 3" deck thickness • 2 3/4" overall height • 15-ounce bottle • Refillable from above the deck
 VoiceIQ® Module	EP100854	• VoiceIQ® Technology for hands-free voice activation • For use with SmartTouch® faucets manufactured after January 2018 • Includes VoiceIQ® module, cable and 9 volt power supply • Pairs with Amazon® Alexa® and Google® Assistant-enabled devices • Metered and custom dispensing options • Warm-up feature pre-heats the water to 95° • Handwashing mode using CDC recommended guidelines







ROOK® KITCHEN COLLECTION

A move ahead.

The Rook® Kitchen Collection by Brizo® exudes stately elegance at every turn. Its classic craftsman style is reminiscent of an early 20th century aesthetic, while contemporary, feminine touches elevate and modernize the look. Graceful curves complement precise angles, resulting in an exquisitely calculated balance.

Available Finishes

- POLISHED CHROME (PC)
- *BRILLIANCE®* POLISHED NICKEL (PN)
- *BRILLIANCE®* STAINLESS (SS)
- MATTE BLACK (BL)
- *BRILLIANCE®* POLISHED GOLD (PG)
- *BRILLIANCE®* LUXE GOLD® (GL)
- *BRILLIANCE®* LUXE STEEL® (SL)

KITCHEN FAUCETS

Item	Item No.	Description
 Pull-Down Faucet	63074LF-PC 63074LF-PN 63074LF-SS 63074LF-BL 63074LF-PG 63074LF-GL 63074LF-SL	• MagneDock® Technology – magnetic docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 15 7/8", spout outlet to deck = 8 5/8", spout reach = 8 7/8", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414kPa
 SmartTouch® Pull-Down Faucet	64074LF-PC 64074LF-PN 64074LF-SS 64074LF-BL 64074LF-PG 64074LF-GL 64074LF-SL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EP102157 • Optional voice activation technology (EP100854) available for use with connected home devices. • For additional product details reference the non-SmartTouch® Technology model
 Articulating Bridge Faucet	62274LF-PC 62274LF-PN 62274LF-SS 62274LF-BL 62274LF-PG 62274LF-GL 62274LF-SL	• MagneDock® Technology – magnetic docking system • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 2-hole installation • Dual-jointed articulating arm with semi-flexible hose allows for flexible placement and maneuverability • Overall height varies with arm position. Maximum height = 19 3/8", maximum arm reach = 10 1/2", hose length = 23"; arm swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa • Optional decorative center hole cover available RP90934
 Articulating Bridge Faucet with Finished Hose	62174LF-PC 62174LF-PN 62174LF-SS 62174LF-BL 62174LF-PG 62174LF-GL 62174LF-SL	• MagneDock® Technology – magnetic docking system • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 2-hole installation • Dual-jointed articulating arm with semi-flexible hose allows for flexible placement and maneuverability • Overall height varies with arm position. Maximum height = 19 3/8", maximum arm reach = 10 1/2", hose length = 23"; arm swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa • Optional decorative center hole cover available RP90934

PREP FAUCETS

Item	Item No.	Description
 Pull-Down Prep Faucet	63974LF-PC 63974LF-PN 63974LF-SS 63974LF-BL 63974LF-PG 63974LF-GL 63974LF-SL	• MagneDock® Technology – magnetic docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 14 5/16", spout outlet to deck = 7 3/8", spout reach = 8", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414kPa
 SmartTouch® Pull-Down Prep Faucet	64974LF-PC 64974LF-PN 64974LF-SS 64974LF-BL 64974LF-PG 64974LF-GL 64974LF-SL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EP100854) available for use with connected home devices. • Optional A/C adapter EP102157 • For additional product details reference the non-SmartTouch® Technology model

BAR FAUCET

Item	Item No.	Description
 Bar Faucet	61074LF-PC 61074LF-PN 61074LF-SS 61074LF-BL 61074LF-PG 61074LF-GL 61074LF-SL	• 1-hole installation • Ceramic cartridge • Overall height = 12 3/8", spout outlet to deck = 8 1/4", spout reach = 6 5/16", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414kPa

INSTANT HOT FAUCET

Item	Item No.	Description
 Instant Hot Faucet	61374LF-H-PC 61374LF-H-PN 61374LF-H-SS 61374LF-H-BL 61374LF-H-PG 61374LF-H-GL 61374LF-H-SL	• Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 9 3/16" , spout to deck = 5 15/16", spout reach = 5 1/16", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa

BEVERAGE FAUCET *(for details on the Pristive™ Tankless Reverse Osmosis System, see pages 84–89)*

Item	Item No.	Description
 Beverage Faucet	61374LF-C-PC 61374LF-C-PN 61374LF-C-SS 61374LF-C-BL 61374LF-C-PG 61374LF-C-GL 61374LF-C-SL	• DIAMOND Seal® Technology • Compatible with the Pristive™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 1/2", spout to deck = 6 1/16" , spout reach = 5 1/16", spout swivels 360˚ • Accommodates up to 3" deck thickness • Integrated supply tubes • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 Kpa

POT FILLER

Item	Item No.	Description
 Wall Mount Pot Filler Faucet	62874LF-PC 62874LF-PN 62874LF-SS 62874LF-BL 62874LF-PG 62874LF-GL 62874LF-SL	• Two handle wall mount • 1-hole installation • Cold water only • Spout reach = 23 1/4" • Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa

ACCESSORIES *(for kitchen drains and additional accessories, see pages 94–97)*

Item	Item No.	Description
 Soap/Lotion Dispenser	RP100487PC RP100487PN RP100487SS RP100487BL RP100487PG RP100487GL RP100487SL	• Includes installation hardware • Accommodates up to 3" deck thickness • 2 3/4" overall height • 15-ounce bottle • Refillable from above the deck
 Optional Escutcheon	RP100299PC RP100299BL RP100299PN RP100299SS RP100299PG RP100299GL RP100299SL	• Includes installation hardware • Accommodates up to 3" deck thickness • 8" on center
 Hole Cover	RP90934PG RP90934SL	• Includes installation hardware • Accommodates up to 3" deck thickness • 1/3" overall height

ACCESSORIES *(continued) (for kitchen drains and additional accessories, see pages 94-97)*

Item	Item No.	Description
 VoiceIQ® Module	EP100854	• VoiceIQ® Technology for hands-free voice activation • For use with SmartTouch® faucets manufactured after January 2018 • Includes VoiceIQ® module, cable and 9 volt power supply • Pairs with Amazon® Alexa® and Google® Assistant-enabled devices • Metered and custom dispensing options • Warm-up feature pre-heats the water to 95° • Handwashing mode using CDC recommended guidelines

HARDWARE

Item	Item No.	Description
 Drawer Knob	699261-PC 699261-PN 699261-NK 699261-NKBL 699261-GL 699261-RB	• Mounting hardware included • All metal construction
 Drawer Pull	699161-PC 699161-PN 699161-NK 699161-NKBL 699161-GL 699161-RB	• Mounting hardware included • All metal construction • 4" center to center distance


THIS IS HOME





TULHAM™ KITCHEN COLLECTION

The spirit of reinvention.

Grandeur takes a playful turn in the Tulham™ Kitchen Collection. Elegant contours combine with art deco motifs for an inventive blend of the traditional and the avant-garde. From the tone-on-tone split finishes to the fluting details, the collection truly captures an artistic spirit.

Available Finishes

- POLISHED CHROME (PC)
- *BRILLIANCE®* POLISHED NICKEL (PN)
- *BRILLIANCE®* STAINLESS (SS)
- MATTE BLACK / *BRILLIANCE®* BLACK ONYX (BLBNX)
- *BRILLIANCE®* LUXE GOLD® / *BRILLIANCE®* POLISHED GOLD (GLPG)
- *BRILLIANCE®* LUXE STEEL® (SL)

KITCHEN FAUCETS

Item	Item No.	Description
 Pull-Down Kitchen Faucet	63058LF-PC 63058LF-PN 63058LF-SS 63058LF-BLBNX 63058LF-GLPG 63058LF-SL	• MagneDock® Technology – magnetic docking system • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • Euro-motion Diamond™ Valve with InnoFlex™ waterways • 1-hole installation • Overall height = 17 9/16", spout outlet to deck = 9 15/16", spout reach = 9", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa
 SmartTouch® Pull-Down Kitchen Faucet	64058LF-PC 64058LF-PN 64058LF-SS 64058LF-BLBNX 64058LF-GLPG 64058LF-SL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EP100854) available for use with connected home devices. • Optional A/C adapter EP102157 • For additional product details reference the non-SmartTouch® Technology model
 Bridge Kitchen Faucet with Side Spray	62558LF-PC 62558LF-PN 62558LF-SS 62558LF-BLBNX 62558LF-GLPG 62558LF-SL	• Includes matching metal side sprayer • 3-hole installation • Solid brass one-piece waterway • Ceramic cartridges • Overall height = 15 13/16", spout outlet to deck = 10 7/16", spout reach = 8 1/4", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa • Comes with standard fittings • Optional decorative center hole cover available RP90934

PREP FAUCETS

Item	Item No.	Description
 Pull-Down Prep Kitchen Faucet	63958LF-PC 63958LF-PN 63958LF-SS 63958LF-BLBNX 63958LF-GLPG 63958LF-SL	• MagneDock® Technology – magnetic docking system • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • Euro-motion Diamond™ Valve with InnoFlex™ waterways • 1-hole installation • Overall height = 16", spout outlet to deck = 8 11/16", spout reach = 8 1/16", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa
 SmartTouch® Pull-Down Prep Kitchen Faucet	64958LF-PC 64958LF-PN 64958LF-SS 64958LF-BLBNX 64958LF-GLPG 64958LF-SL	• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EP100854) available for use with connected home devices. • Optional A/C adapter EP102157 • For additional product details reference the non-SmartTouch® Technology model

BAR FAUCET

Item	Item No.	Description
 Bar Faucet	61058LF-PC 61058LF-PN 61058LF-SS 61058LF-BLBNX 61058LF-GLPG 61058LF-SL	• 1-hole installation • Ceramic cartridge • Overall height = 12 3/8", spout outlet to deck = 8 1/16", spout reach = 6 3/8", spout swivels 360° • Accommodates up to 2 1/2" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa

INSTANT HOT FAUCET

Item	Item No.	Description
 Instant Hot Faucet	61358LF-H-PC 61358LF-H-PN 61358LF-H-SS 61358LF-H-BLBNX 61358LF-H-GLPG 61358LF-H-SL	• Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 9 7/16", spout to deck = 6 1/8", spout reach = 5 1/16", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa

BEVERAGE FAUCET *(for details on the Pristive™ Tankless Reverse Osmosis System, see pages 84–89)*

Item	Item No.	Description
 Beverage Faucet	61358LF-C-PC 61358LF-C-PN 61358LF-C-SS 61358LF-C-BLBNX 61358LF-C-GLPG 61358LF-C-SL	• DIAMOND Seal® Technology • Compatible with the Pristive™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 9/16", spout to deck = 6 1/8", spout reach = 5 1/16", spout swivels 360°" • Accommodates up to 3" deck thickness • Integrated supply tubes • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa

POT FILLER

Item	Item No.	Description
 Wall Mount Pot Filler	62858LF-PC 62858LF-PN 62858LF-SS 62858LF-BLBNX 62858LF-GLPG 62858LF-SL	• Two handle wall mount • 1-hole installation • Cold water only • Spout reach = 23 1/4" • Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa

ACCESSORIES *(for kitchen drains and additional accessories, see pages 94–97)*

Item	Item No.	Description
 Soap/Lotion Dispenser	RP101658PC RP101658PN RP101658SS RP101658BLBNX RP101658GLPG RP101658SL	• Includes installation hardware • Accommodates up to 3" deck thickness • 2 3/4" overall height • 15-ounce bottle • Refillable from above the deck
 Optional Escutcheon	RP101659PC RP101659PN RP101659SS RP101659BL RP101659GL RP101659SL	• Includes installation hardware • Accommodates up to 3" deck thickness • 8" on center
 Hole Cover	RP90934PC RP90934PN RP90934SS RP90934BL RP90934GL RP90934SL	• Includes installation hardware • Accommodates up to 3" deck thickness • 1/3" overall height
 VoiceIQ® Module	EP100854	• VoiceIQ® Technology for hands-free voice activation • For use with SmartTouch® faucets manufactured after January 2018 • Includes VoiceIQ® module, cable and 9 volt power supply • Pairs with Amazon® Alexa® and Google® Assistant-enabled devices • Metered and custom dispensing options • Warm-up feature pre-heats the water to 95° • Handwashing mode using CDC recommended guidelines







INSTANT HOT FAUCETS

Effortless harmony.

Brizo® Instant Hot faucets easily coordinate with any aesthetic, elevating the culinary experience with style and convenience. The near boiling water from the Instant Hot faucet is ready at a moment's notice—ideal for aromatherapy, steeping tea, brewing French press coffee and more.

Available Finishes

- POLISHED CHROME (PC)
- *BRILLIANCE®* POLISHED NICKEL (PN)
- *BRILLIANCE®* STAINLESS (SS)
- VENETIAN BRONZE® (RB)
- MATTE BLACK (BL)
- MATTE WHITE (MW)
- *BRILLIANCE®* BLACK ONYX (BNX)
- *BRILLIANCE®* POLISHED GOLD (PG)
- *BRILLIANCE®* LUXE GOLD® (GL)
- *BRILLIANCE®* LUXE STEEL® (SL)
- MATTE BLACK / *BRILLIANCE®* LUXE GOLD® (BLGL)
- *BRILLIANCE®* LUXE GOLD® / *BRILLIANCE®* POLISHED GOLD (GLPG)
- MATTE BLACK / *BRILLIANCE®* BLACK ONYX (BLBNX)

INSTANT HOT FAUCETS

Item	Item No.	Description
 Artesso® Instant Hot Faucet	61325LF-H-PC 61325LF-H-PN 61325LF-H-SS 61325LF-H-BL 61325LF-H-GL 61325LF-H-RB	• Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 9 3/8", spout to deck = 6 3/16", spout reach = 5", spout swivels 360˚ • Accommodates up to 3" deck thickness • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa
 Kintsu® Instant Hot Faucet with Arc Spout	61306LF-H-PC-L 61306LF-H-SS-L 61306LF-H-BL 61306LF-H-BNX-L 61306LF-H-GL-L	• Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 8 15/16", spout to deck = 6 3/16", spout reach = 5", spout swivels 360˚ • Accommodates up to 3" deck thickness • L = Lumicoat® Technology • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa
 Kintsu® Instant Hot Faucet with Square Spout	61307LF-H-PC-L 61307LF-H-SS-L 61307LF-H-BL 61307LF-H-BNX-L 61307LF-H-GL-L	• Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 8 15/16", spout to deck = 6 3/16", spout reach = 5", spout swivels 360˚ • Accommodates up to 3" deck thickness • L = Lumicoat® Technology • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa

Item	Item No.	Description
 Litze® Instant Hot Faucet with Arc Spout and Knurled Handle	61343LF-H-PC 61343LF-H-PN 61343LF-H-SS 61343LF-H-BLGL 61343LF-H-GL	• Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 9 1/16", spout to deck = 5 7/8", spout reach = 5", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa
 Litze® Instant Hot Faucet with Square Spout and Knurled Handle	61353LF-H-PC 61353LF-H-PN 61353LF-H-SS 61353LF-H-BLGL 61353LF-H-GL	• Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 8 15/16", spout to deck = 6 3/16", spout reach = 5", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa
 Litze® Instant Hot Faucet with Angled Spout and Knurled Handle	61363LF-H-PC 61363LF-H-PN 61363LF-H-SS 61363LF-H-BLGL 61363LF-H-GL	• Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 9", spout to deck = 6 3/16", spout reach = 5", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa
 Instant Hot Faucet with Arc Spout	61320LF-H-PC 61320LF-H-PN 61320LF-H-MW 61320LF-H-SS 61320LF-H-BL 61320LF-H-PG 61320LF-H-GL 61320LF-H-SL	• Coordinates with the Odin® and Jason Wu for Brizo™ kitchen collections • Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 9 1/16", spout to deck = 5 7/8", spout reach = 5", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa
 Instant Hot Faucet with Square Spout	61365LF-H-PC 61365LF-H-PN 61365LF-H-MW 61365LF-H-SS 61365LF-H-BL 61365LF-H-PG 61365LF-H-GL 61365LF-H-SL	• Coordinates with the Odin® and Jason Wu for Brizo™ kitchen collections • Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 8 15/16", spout to deck = 6 3/16", spout reach = 5", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa

INSTANT HOT FAUCETS *(continued)*

Item	Item No.	Description
 Rook® Instant Hot Faucet	61374LF-H-PC 61374LF-H-PN 61374LF-H-SS 61374LF-H-BL 61374LF-H-PG 61374LF-H-GL 61374LF-H-SL	• Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 9 3/16" , spout to deck = 5 15/16", spout reach = 5 1/16", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa
 Tulham™ Instant Hot Faucet	61358LF-H-PC 61358LF-H-PN 61358LF-H-SS 61358LF-H-BLBNX 61358LF-H-GLPG 61358LF-H-SL	• Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 9 3/8", spout to deck = 6 3/16", spout reach = 5", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa



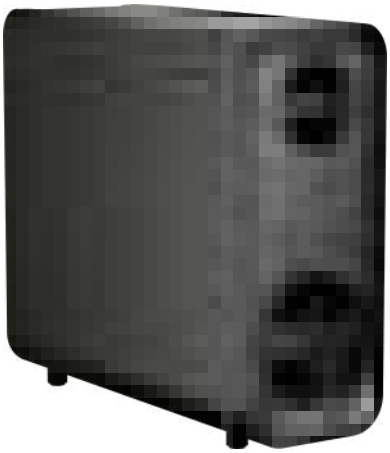

PRISTIVE™ TANKLESS REVERSE OSMOSIS SYSTEM

Purer water beckons.

Harness the power of reverse osmosis for cleaner, fresher, and more sustainable water purification. The Pristive™ Tankless Reverse Osmosis System, including collection matching beverage faucets, reduces more than 90 contaminants from your drinking water, when tested against NSF standards.

Available Finishes

- POLISHED CHROME (PC)
- *BRILLIANCE®* POLISHED NICKEL (PN)
- *BRILLIANCE®* STAINLESS (SS)
- VENETIAN BRONZE® (RB)
- MATTE BLACK (BL)
- MATTE WHITE (MW)
- *BRILLIANCE®* BLACK ONYX (BNX)
- *BRILLIANCE®* POLISHED GOLD (PG)
- *BRILLIANCE®* LUXE GOLD® (GL)
- *BRILLIANCE®* LUXE STEEL® (SL)
- *BRILLIANCE®* LUXE GOLD® / *BRILLIANCE®* POLISHED GOLD (GLPG)
- MATTE BLACK / *BRILLIANCE®* BLACK ONYX (BLBNX)
- MATTE BLACK/ *BRILLIANCE®* LUXE GOLD® (BLGL)

PRISTIVE™ TANKLESS REVERSE OSMOSIS SYSTEM

Item	Item No.	Description
 Pristive™ Tankless Reverse Osmosis System	BWQ1001012	• Multi-stage tankless reverse osmosis water filtration system • 800 GPD (0.56 GPM) production rate • Tankless under-sink installation and compact design • For cold water installations only • Requires AC power outlet • System pairs with any Brizo® beverage faucet with air gap, or refrigerator • System includes 3 filter cartridges: Reverse Osmosis Filter, Carbon Filter and Pre-Filter • Optional remineralizer cartridge available for enhanced taste and pH balance • 2.5:1 filtered-to-waste water ratio • Certified reduction of more than 90 contaminants from drinking water when tested against NSF standards, including: lead, total PFAS, arsenic, bacteria, virus, chlorine, chromium, copper, TDS, mercury, microplastics, pharmaceuticals, and heavy metals. • Tankless RO system provides a constant flow of water and wastes less water compared to tanked systems • The Privistive™ Tankless RO system is rigorously tested against numerous NSF standards • Low maintenance filtration system makes filter changes easy • Integrated filter life tracking and internal leak detection with audible alerts

PRISTIVE™ REMINERALIZER & FILTERS

Item	Item No.	Description
 Pristive™ Remineralizer Cartridge	BWQ300300	• Optional Remineralizer Cartridge to be used with Brizo RO system BWQ1001012 • In-line installation • For cold water use only • Lifespan - 2 years or 1,320 gallons
 Pristive™ Reverse Osmosis Filter Cartridge	BWQ300102	• Replacement filter for Brizo RO system BWQ1001012 • Quick quarter turn installation • For cold water use only • Lifespan - 2 years or 1,320 gallons
 Pristive™ Carbon Filter Cartridge	BWQ300202	• Replacement filter for Brizo RO system BWQ1001012 • Quick quarter turn installation • For cold water use only • Lifespan - 2 years or 1,320 gallons
 Pristive™ Pre-Filter	BWQ300350	• Replacement filter for Brizo RO system BWQ1001012 • In-line installation • For cold water use only • Lifespan - 6 years or 3,960 gallons

BEVERAGE FAUCETS

Item	Item No.	Description
 Artesso® Beverage Faucet	61325LF-C-PC 61325LF-C-PN 61325LF-C-SS 61325LF-C-BL 61325LF-C-GL 61325LF-C-RB	• DIAMOND Seal® Technology • Compatible with the Pristive™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 1/2", spout to deck = 6 1/16", spout reach = 5 1/16", spout swivels 360˚ • Accommodates up to 3" deck thickness • Integrated supply tubes • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
 Litze® Beverage Faucet with Arc Spout and Knurled Handle	61343LF-C-PC 61343LF-C-PN 61343LF-C-SS 61343LF-C-BLGL 61343LF-C-GL	• DIAMOND Seal® Technology • Compatible with the Pristive™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 1/2", spout to deck = 6 1/16", spout reach = 5 1/16", spout swivels 360˚ • Accommodates up to 3" deck thickness • Integrated supply tubes • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
 Litze® Beverage Faucet with Square Spout and Knurled Handle	61353LF-C-PC 61353LF-C-PN 61353LF-C-SS 61353LF-C-BLGL 61353LF-C-GL	• DIAMOND Seal® Technology • Compatible with the Pristive™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 7/16", spout to deck = 6 7/16", spout reach = 5", spout swivels 360˚ • Accommodates up to 3" deck thickness • Integrated supply tubes • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
 Litze® Beverage Faucet with Angled Spout and Knurled Handle	61363LF-C-PC 61363LF-C-PN 61363LF-C-SS 61363LF-C-BLGL 61363LF-C-GL	• DIAMOND Seal® Technology • Compatible with the Pristive™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 11/16", spout to deck = 6 5/16", spout reach = 5", spout swivels 360˚ • Accommodates up to 3" deck thickness • Integrated supply tubes • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
 Kintsu® Beverage Faucet with Square Spout	61307LF-C-PC-L 61307LF-C-SS-L 61307LF-C-BL 61307LF-C-BNX-L 61307LF-C-GL-L	• DIAMOND Seal® Technology • Compatible with the Pristive™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 7/16", spout to deck = 6 7/16", spout reach = 5 1/16", spout swivels 360˚ • Accommodates up to 3" deck thickness • Integrated supply tubes • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain • L = Lumicoat® Technology • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa

BEVERAGE FAUCETS

Item	Item No.	Description
 Beverage Faucet with Arc Spout	61320LF-C-PC 61320LF-C-PN 61320LF-C-MW 61320LF-C-SS 61320LF-C-BL 61320LF-C-PG 61320LF-C-GL 61320LF-C-SL	• Coordinates with the Odin® and Jason Wu for Brizo™ kitchen collections • DIAMOND Seal® Technology • Compatible with the Pristive™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 1/2", spout to deck = 6 1/16", spout reach = 5 1/16", spout swivels 360˚ • Accommodates up to 3" deck thickness • Integrated supply tubes • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
 Beverage Faucet with Square Spout	61365LF-C-PC 61365LF-C-PN 61365LF-C-MW 61365LF-C-SS 61365LF-C-BL 61365LF-C-PG 61365LF-C-GL 61365LF-C-SL	• Coordinates with the Odin® and Jason Wu for Brizo™ kitchen collections • DIAMOND Seal® Technology • Compatible with the Pristive™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 7/16", spout to deck = 6 7/16", spout reach = 5", spout swivels 360˚ • Accommodates up to 3" deck thickness • Integrated supply tubes • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
 Rook® Beverage Faucet	61374LF-C-PC 61374LF-C-PN 61374LF-C-SS 61374LF-C-BL 61374LF-C-PG 61374LF-C-GL 61374LF-C-SL	• DIAMOND Seal® Technology • Compatible with the Pristive™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 1/2", spout to deck = 6 1/16" , spout reach = 5 1/16" , spout swivels 360˚ • Accommodates up to 3" deck thickness • Integrated supply tubes • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 Kpa
 Tulham™ Beverage Faucet	61358LF-C-PC 61358LF-C-PN 61358LF-C-SS 61358LF-C-BLBNX 61358LF-C-GLPG 61358LF-C-SL	• DIAMOND Seal® Technology • Compatible with the Pristive™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 9/16", spout to deck = 6 1/8", spout reach = 5 1/16", spout swivels 360˚ • Accommodates up to 3" deck thickness • Integrated supply tubes • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
 Kintsu® Beverage Faucet with Arc Spout	61306LF-C-PC-L 61306LF-C-SS-L 61306LF-C-BL 61306LF-C-BNX-L 61306LF-C-GL-L	• DIAMOND Seal® Technology • Compatible with the Pristive™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 7/16", spout to deck = 6 7/16", spout reach = 5 1/16", spout swivels 360˚ • Accommodates up to 3" deck thickness • Integrated supply tubes • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain • L = Lumicoat® Technology • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa

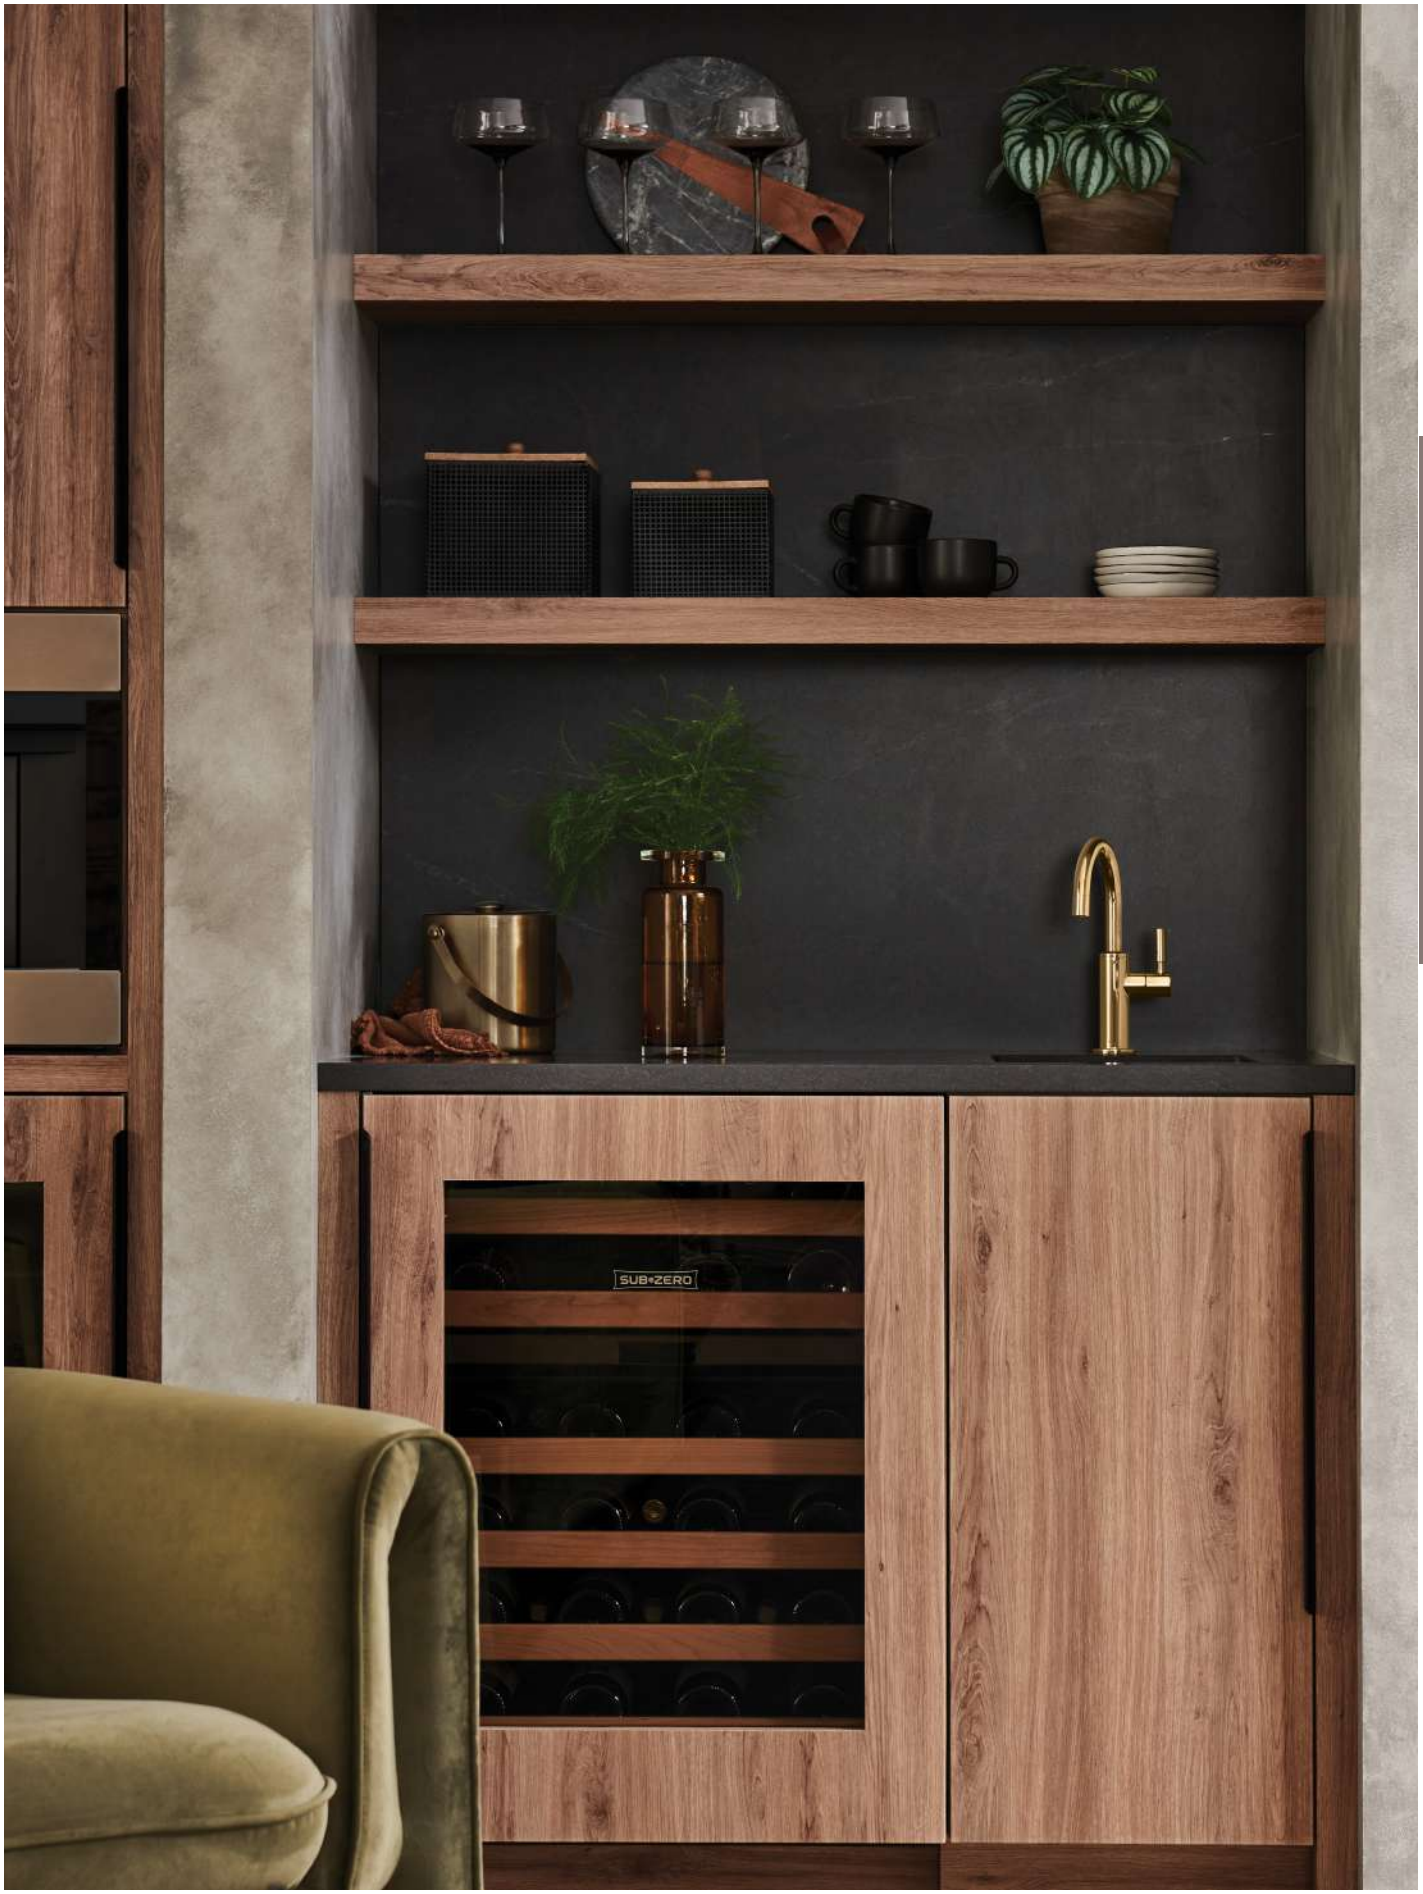
SUB-ZERO



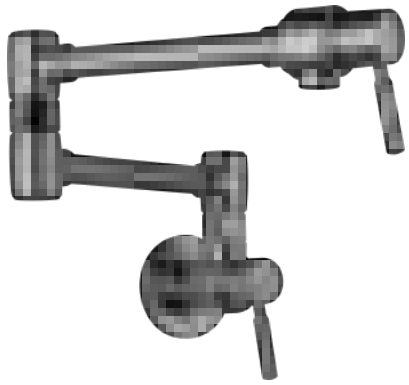

POT FILLERS

The perfect complement.

For those seeking even more versatility and convenience, pot fillers are a superb addition to any culinary space and make it easy to fill large cooking vessels quickly—and without the walk from the sink to the stove. Brizo® Pot Fillers are available in a range of styles and finishes, ensuring a look that complements any décor or Brizo® collection.

Available Finishes

- POLISHED CHROME (PC)
- *BRILLIANCE®* POLISHED NICKEL (PN)
- *BRILLIANCE®* STAINLESS (SS)
- VENETIAN BRONZE® (RB)
- MATTE BLACK (BL)
- MATTE WHITE (MW)
- *BRILLIANCE®* BLACK ONYX (BNX)
- *BRILLIANCE®* POLISHED GOLD (PG)
- *BRILLIANCE®* LUXE GOLD® (GL)
- *BRILLIANCE®* LUXE STEEL® (SL)
- MATTE BLACK / *BRILLIANCE®* LUXE GOLD® (BLGL)
- *BRILLIANCE®* LUXE GOLD® / *BRILLIANCE®* POLISHED GOLD (GLPG)
- MATTE BLACK / *BRILLIANCE®* BLACK ONYX (BLBNX)

WALL MOUNT POT FILLER FAUCETS

Item	Item No.	Description
 Artesso® Wall Mount Pot Filler Faucet	62825LF-PC 62825LF-PN 62825LF-SS 62825LF-BL 62825LF-GL 62825LF-RB	• Two handle wall mount • 1-hole installation • Cold water only • Spout reach = 23 1/4" • Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa
 Linear Wall Mount Pot Filler Faucet	62820LF-PC 62820LF-PN 62820LF-MW 62820LF-SS 62820LF-BL 62820LF-PG 62820LF-GL 62820LF-SL 62820LF-RB	• Two handle wall mount • 1-hole installation • Cold water only • Spout reach = 23 1/4" • Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa • Coordinates with the Odin® and Jason Wu for Brizo™ kitchen collections
 Kintsu® Wall Mount Pot Filler with Lever Handle	62806LF-PC-L 62806LF-SS-L 62806LF-BL 62806LF-BNX-L 62806LF-GL-L	• Two handle wall mount • 1-hole installation • Cold water only • L = Lumicoat® Technology • Spout reach = 20 1/2" • Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa
 Kintsu® Wall Mount Pot Filler with Knob Handle	62807LF-PC-L 62807LF-SS-L 62807LF-BL 62807LF-BNX-L 62807LF-GL-L	• Two handle wall mount • 1-hole installation • Cold water only • L = Lumicoat® Technology • Spout reach = 20 1/2" • Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa

WALL MOUNT POT FILLER FAUCETS *(continued)*

Item	Item No.	Description
 Litze® Wall Mount Pot Filler Faucet with Knurled Handle	62843LF-PC 62843LF-PN 62843LF-SS 62843LF-BLGL 62843LF-GL	• Two handle wall mount • 1-hole installation • Cold water only • Spout reach = 23 1/4" • Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa
 Litze® Wall Mount Pot Filler Faucet with Industrial Handle	62844LF-PC 62844LF-PN 62844LF-SS 62844LF-BLGL 62844LF-GL	• Two handle wall mount • 1-hole installation • Cold water only • Spout reach = 23 1/4" • Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa
 Rook® Wall Mount Pot Filler Faucet	62874LF-PC 62874LF-PN 62874LF-SS 62874LF-BL 62874LF-PG 62874LF-GL 62874LF-SL	• Two handle wall mount • 1-hole installation • Cold water only • Spout reach = 23 1/4" • Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa
 Tulham™ Wall Mount Pot Filler Faucet	62858LF-PC 62858LF-PN 62858LF-SS 62858LF-BLBNX 62858LF-GLPG 62858LF-SL	• Two handle wall mount • 1-hole installation • Cold water only • Spout reach = 23 1/4" • Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa



KITCHEN ACCESSORIES

SOAP/LOTION DISPENSERS

Item	Item No.	Description
 Soap/Lotion Dispenser	RP75675PC RP75675PN RP75675SS RP75675BL RP75675GL RP75675RB	• Coordinates with the Artesso® kitchen collection • Includes installation hardware • Accommodates up to 3" deck thickness • 2 3/4" overall height • 15-ounce bottle • Refillable from above the deck
 Soap/Lotion Dispenser	695306-PC-L 695306-SS-L 695306-BL 695306-BNX-L 695306-GL-L	• Coordinates with the Kintsu® kitchen collection • Includes installation hardware • Accommodates up to 3" deck thickness • 2 3/4" overall height • 15-ounce bottle • Refillable from above the deck • L = Lumicoat® Technology
 Soap/Lotion Dispenser	RP79275PC RP79275PN RP79275BL RP79275MW RP79275SS RP79275PG RP79275SL RP79275GL	• Coordinates with the Litze®, Odin® and Jason Wu for Brizo™ kitchen collections • Includes installation hardware • Accommodates up to 3" deck thickness • 2 3/4" overall height • 15-ounce bottle • Refillable from above the deck
 Soap/Lotion Dispenser	RP100487PC RP100487PN RP100487SS RP100487BL RP100487PG RP100487GL RP100487SL	• Coordinates with the Rook® kitchen collection • Includes installation hardware • Accommodates up to 3" deck thickness • 2 3/4" overall height • 15-ounce bottle • Refillable from above the deck

SOAP/LOTION DISPENSERS *(continued)*

Item	Item No.	Description
 Soap/Lotion Dispenser	RP101658PC RP101658PN RP101658SS RP101658BLBNX RP101658GLPG RP101658SL	• Coordinates with the Tulham™ kitchen collection • Includes installation hardware • Accommodates up to 3" deck thickness • 2 3/4" overall height • 15-ounce bottle • Refillable from above the deck

HOLE COVERS

Item	Item No.	Description
 Hole Cover	RP90934PC RP90934PN RP90934BL RP90934SS RP90934PG RP90934GL RP90934SL	• Includes installation hardware • Accommodates up to 3" deck thickness • 1/3" overall height

AIR SWITCHES

Item	Item No.	Description
 Air Switch	69080-PC 69080-PN 69080-SS 69080-BL 69080-MW 69080-PG 69080-GL 69080-SL 69080-RB	• Dual outlet controller for waste disposal and one additional accessory • Brass button and trim with polyethylene body • Simple plug-in installation of control box • Installed in 1-1/4" openings • 6' flexible hose included

AIR GAPS

Item	Item No.	Description
 Air Gap	69060-PC 69060-PN 69060-SS 69060-BL 69060-BNX 69060-PG 69060-GL 69060-SL 69060-RB	• Polyethylene body • 5/8" dishwasher inlet, 7/8" outlet • 1 7/8" diameter, 2 1/8" long brass cap

KITCHEN DRAINS

Item	Item No.	Description
 Flange with Strainer	69052-PC 69052-PN 69052-SS 69052-PG 69052-BNX 69052-GL 69052-SL	• Solid brass construction with stainless steel mounting hardware • Top-mount flange installation for 4 1/2" sink openings • 1 1/2" x 11 1/2" NPSM threads
 Disposal Flange with Stopper	69070-PC 69070-PN 69070-SS 69070-PG 69070-GL 69070-SL	• Solid brass construction • Top-mount flange installation for 4 1/2" sink openings • Use with sink styles that require waste disposal to be installed up to 3/4" from sink opening
 Disposal Flange with Stopper	69072-PC 69072-PN 69072-SS 69072-PG 69072-BNX 69072-GL 69072-SL	• Solid brass construction • Top-mount flange installation for 3 1/2" sink openings • Use with sink styles that require waste disposal to be installed between 3/4" to 1 1/2" from sink opening

VOICEIQ® TECHNOLOGY

Item	Item No.	Description
 VoiceIQ® Module	EP100854	• VoiceIQ® Technology for hands-free voice activation • For use with SmartTouch® faucets manufactured after January 2018 • Includes VoiceIQ® module, cable and 9 volt power supply • Pairs with Amazon® Alexa® and Google® Assistant-enabled devices • Metered and custom dispensing options • Warm-up feature pre-heats the water to 95° • Handwashing mode using CDC recommended guidelines



AKABA

akaba.mx